



Standard Mantel Dimensions

| Cabinet | A | B | C | D | E | F | G | H | I | J | K | L | Wt. |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|---|-----|
| EMF22 | 38 3/8 | 13 1/4 | 38 1/2 | 35 | 12 3/8 | 23 | 26 3/4 | 11 3/4 | 24 1/2 | 17 3/8 | 3 1/4 | | 55 |
| EMBF1S | 56 3/4 | 22 1/4 | 51 3/8 | 49 | 19 1/8 | 34 1/2 | 33 3/4 | 18 1/2 | 38 1/2 | 22 1/2 | 3 1/4 | | 166 |
| EMBF2S | 60 3/4 | 22 1/4 | 51 3/8 | 53 | 19 1/8 | 38 1/2 | 33 3/4 | 18 1/2 | 42 1/2 | 22 1/2 | 3 1/4 | | 174 |
| EMBF3S | 62 3/4 | 25 3/4 | 53 3/8 | 55 | 22 5/8 | 40 1/2 | 35 3/4 | 22 | 44 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF4S | 66 3/4 | 25 3/4 | 53 3/8 | 59 | 22 5/8 | 44 1/2 | 35 3/4 | 22 | 48 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF5S | 56 3/4 | 27 3/4 | 56 5/8 | 49 | 24 5/8 | 34 1/2 | 39 | 24 | 38 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF6S | 62 3/4 | 27 3/4 | 56 5/8 | 55 | 24 5/8 | 40 1/2 | 39 | 24 | 44 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF7S | 66 3/4 | 27 3/4 | 56 5/8 | 59 | 24 5/8 | 44 1/2 | 39 | 24 | 48 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF8S | 62 3/4 | 22 1/4 | 53 3/8 | 55 | 19 1/8 | 40 1/2 | 35 3/4 | 18 1/2 | 44 1/2 | 22 1/2 | 3 1/4 | | |
| EMBF9S | 55 | 27 3/4 | 47 | 47 1/2 | 24 3/4 | 33 | 26 1/2 | 24 | 34 3/4 | 23 7/8 | 3 1/4 | | |
| EMBF11S | 45 3/8 | 17 1/4 | 41 | 39 1/2 | 14 5/8 | 30 | 30 1/2 | 14 | 41 | 16 1/4 | 3 1/4 | | |
| EMF1A32 | 54 5/8 | 19 3/8 | 46 3/4 | 54 | 19 | 35 | 33 1/2 | 19 | - | - | - | | |
| EMF1A36 | 59 5/8 | 20 3/4 | 48 3/4 | 59 | 20 1/2 | 40 | 35 1/2 | 20 | - | - | - | | |
| EMF1A42 | 63 5/8 | 20 3/4 | 48 3/4 | 63 | 20 1/2 | 44 | 35 1/2 | 20 1/2 | - | - | - | | |

| Corner Cabinet | A | B | C | D | E | F | G | H | I | J | K | L | Wt. |
|----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|--------|-----|
| EMC22 | 42 1/2 | 24 5/8 | 38 1/2 | 40 5/8 | 30 1/8 | 23 | 26 3/4 | 23 1/4 | 24 1/2 | 11 7/8 | 3 1/4 | 28 7/8 | 70 |
| EMBC1S | 63 | 37 1/4 | 51 3/8 | 57 3/4 | 44 1/2 | 34 1/2 | 33 3/4 | 33 1/2 | 38 1/2 | 20 3/4 | 3 1/4 | 40 | |
| EMBC2S | 67 | 39 1/4 | 51 3/8 | 61 3/4 | 47 3/8 | 38 1/2 | 33 3/4 | 35 1/2 | 42 1/2 | 20 3/4 | 3 1/4 | 42 | |
| EMBC3S | 69 | 40 1/4 | 53 3/8 | 63 3/4 | 48 3/4 | 40 1/2 | 35 3/4 | 36 1/2 | 44 1/2 | 20 3/4 | 3 1/4 | 43 | |
| EMBC4S | 73 | 42 1/4 | 53 3/8 | 67 3/4 | 51 5/8 | 44 1/2 | 35 3/4 | 38 1/2 | 48 1/2 | 20 3/4 | 3 1/4 | 45 | |
| EMBC5S | 66 3/8 | 40 3/4 | 56 5/8 | 61 1/4 | 47 | 34 1/2 | 39 | 37 | 38 1/2 | 20 3/4 | 3 1/4 | 43 5/8 | |
| EMBC6S | 72 3/8 | 43 3/4 | 56 5/8 | 67 1/4 | 51 1/4 | 40 1/2 | 39 | 40 | 44 1/2 | 20 3/4 | 3 1/4 | 46 5/8 | |
| EMBC7S | 76 3/8 | 45 3/4 | 56 5/8 | 71 1/4 | 54 1/8 | 44 1/2 | 39 | 42 | 48 1/2 | 20 3/4 | 3 1/4 | 48 5/8 | |
| EMBC8S | 69 | 40 1/4 | 53 3/8 | 63 3/4 | 48 3/4 | 40 1/2 | 35 3/4 | 36 1/2 | 44 1/2 | 20 3/4 | 3 1/4 | 43 | |
| EMBC9S | 63 7/8 | 37 3/4 | 47 | 58 1/4 | 45 1/8 | 33 | 26 1/2 | 33 3/4 | 34 3/4 | 23 7/8 | 3 1/4 | 41 3/4 | |
| EMBC11S | 53 5/8 | 32 5/8 | 41 | 49 7/8 | 38 | 31 | 30 1/2 | 30 1/4 | 41 | 16 5/8 | 3 1/4 | 33 7/8 | |
| EMC1A32 | 61 1/2 | 34 3/8 | 46 3/4 | 61 | 43 1/2 | 35 | 33 1/2 | 34 5/8 | - | - | - | - | |
| EMC1A36 | 66 1/2 | 36 7/8 | 48 3/4 | 66 | 47 | 40 | 35 1/2 | 36 1/2 | - | - | - | - | |
| EMC1A42 | 71 1/2 | 39 3/8 | 48 3/4 | 71 | 52 3/4 | 44 | 35 1/2 | 41 1/2 | - | - | - | - | |



EMBF & EMF

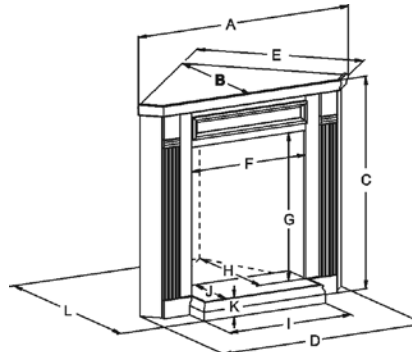

EMBC & EMC

