

PRODUCT SPECIFICATIONS
GCUF32C/GCUF32C-F/GCUF32C-R Vent Free Firebox



MINIMUM HEARTH DIMENSIONS

Front opening width: 29-7/8"
 Front opening height: 21-7/8"
 Rear wall width: 23-3/8"
 Firebox depth: 13-1/4"

TECHNICAL INFORMATION





Clearance to Fireplace: Zero
 CSA Design Certified

FACTORY INSTALLED OPTIONS

Without firebrick (GCUF32C)
 Refractory firebrick (GCUF32C-R)
 Cottage Clay firebrick (GCUF32C-F)

FIELD INSTALLED ACCESSORIES

Louvers: Brass, Pewter
 Curved Trim: Brass, Pewter, Black
 Medium Trim: Brass, Pewter, Black
 Variable Thermostat Controlled Forced Air Blower (160cfm) -BLOTMC
 Brass Hood
 Wide Profile Brass Hood
 Radiant Panel Kits
 Cottage Clay firebrick
 Cottage Red firebrick
 Wood Cabinet Surrounds and Hearths
 Classic and Designer Facings

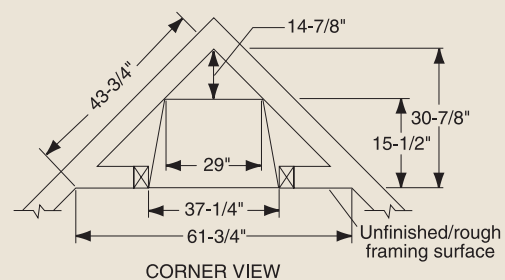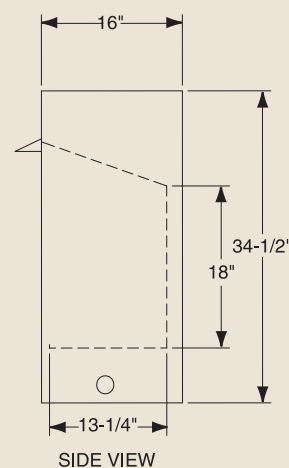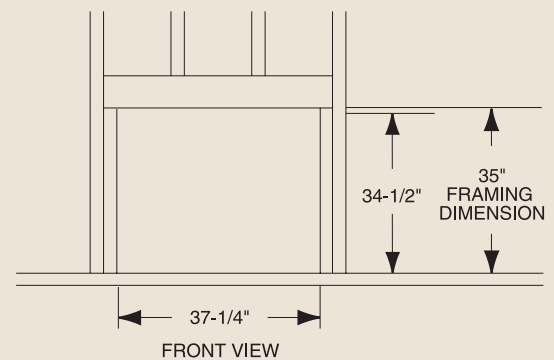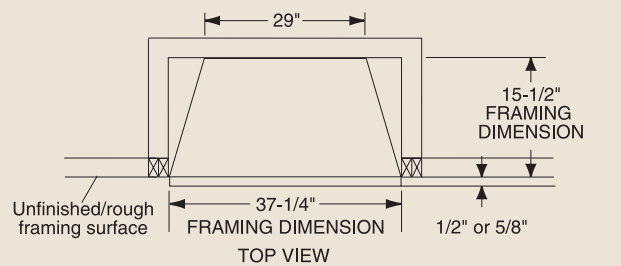

A Brand of Monessen Hearth Systems Co.
 149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.