

PRODUCT SPECIFICATIONS
DFS32C Vent Free



INTERIOR DIMENSIONS





Front opening width: 29-7/8"
 Front opening height: 21-7/8"
 Rear wall width: 23-3/8"
 Firebox depth: 13-1/4"

TECHNICAL INFORMATION

Max. BTU Input: 38,000 BTU/HR
 Ignition System: Standing Pilot
 Gas Type: Natural or LP
 Clearance to Fireplace: Zero
 CSA Design Certified

FIELD INSTALLED ACCESSORIES

Louvers: Polished Brass, Pewter
 Curved Trim: Brass, Pewter, Black
 Medium Trim: Brass, Pewter, Black
 Variable Thermostat Controlled Forced Air Blower (160cfm) - BLOTMC
 Radiant Panel Kits
 Cottage Clay firebrick
 Cottage Red firebrick
 Ambient Technologies™ Remote Controls and Thermostats
 Wood Cabinet Surrounds and Hearths
 Classic and Designer Facings

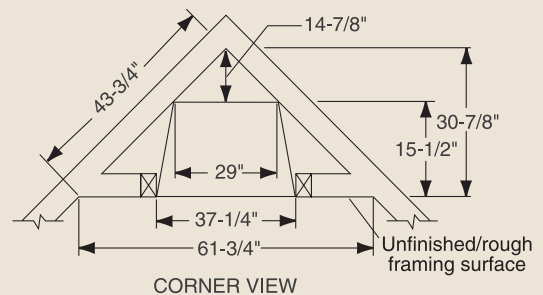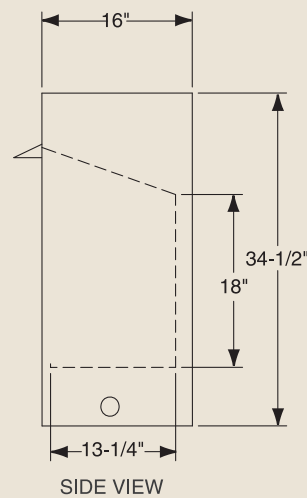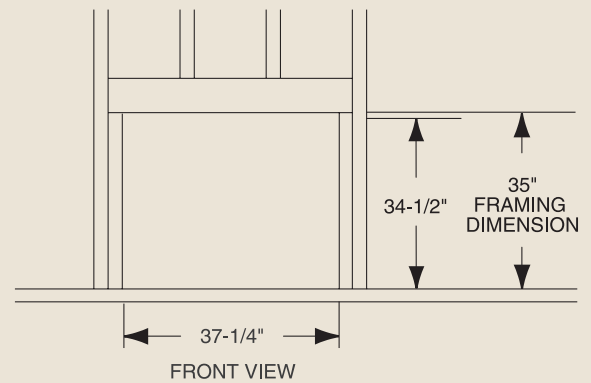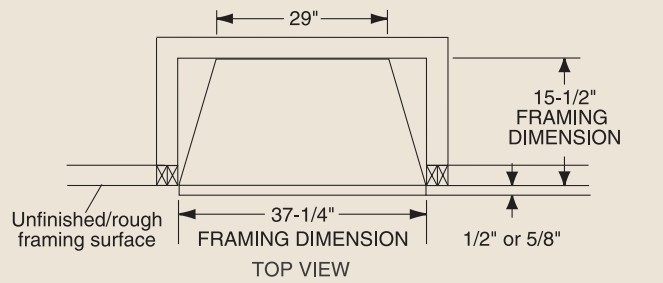

A Brand of Monessen Hearth Systems Co.
 149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.