




A full-sized vent-free universal firebox with the look of a traditional fireplace



UVFRC-3628 shown with optional decorative mesh screen door and VFGL-24-4 gas logs.

UVFRC FIREBOX

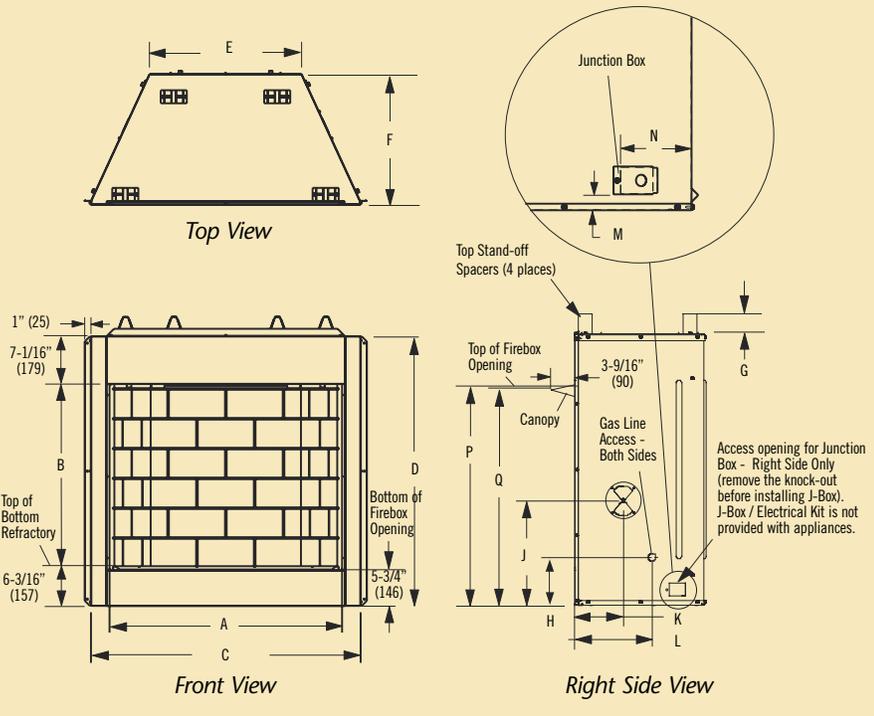

UVFRC-3628

UVFRC-4228-H



Traditional



Herringbone

STANDARD FEATURES

Traditional or Herringbone pattern brick liners offer custom masonry look

Durable charcoal powder coat finish

Mesh draw screens

Easy gas line access with knockouts on both sides

OPTIONAL ACCESSORIES

Forced air blower kit

Decorative mesh screen door (Textured Iron finish)

Outside air kit

Canopy (required for mesh screen doors)

Wall switch

Junction box (required for forced air blower kit)

Cover photo: UVFRC-4228-H shown with VFGL-28-4 gas logs

FIREBOX DIMENSIONS


	UVFRC-3628 & UVFRC-3628H	UVFRC-4228 & UVFRC-4228-H
A	36" (914)	42" (1067)
B	28" (711)	28" (711)
C	41-3/4" (1061)	47-3/4" (1213)
D	41-1/4" (1048)	41-1/4" (1048)
E	23-1/2" (597)	29-1/2" (749)
F	20" (508)	20" (508)
G	3" (76)	3" (76)
H	8-3/8" (213)	8-3/8" (213)
J	15-7/8" (403)	15-7/8" (403)
K	7-1/2" (190)	7-1/2" (190)
L	11-15/16" (303)	11-15/16" (303)
M	1-5/16" (33)	1-5/16" (33)
N	5-1/2" (140)	5-1/2" (140)
P	34-5/16" (872)	34-5/16" (872)
Q	33-5/8" (854)	33-5/8" (854)

Dimensions - inches (millimeters)

FRAMING DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH
UVFRC-3628	42-1/4"	44-1/4"	20-1/2"
UVFRC-4228	48-1/4"	44-1/4"	20-1/2"

HEARTH DIMENSIONS

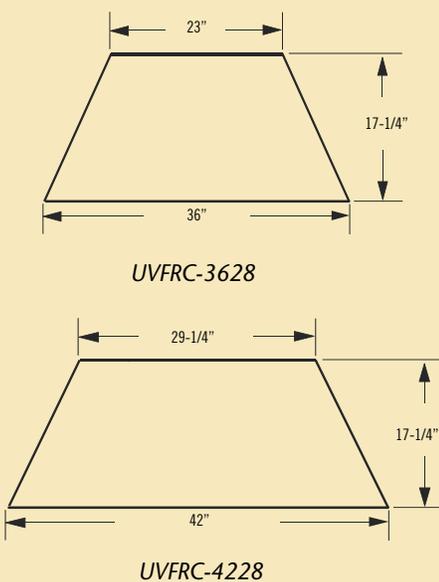

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your Lennox dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams and illustrations are not to scale and should not be used for framing purposes - consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices subject to change or discontinuance without notice.

LISTING: These Universal Vent-Free (built-in) Fireboxes have been tested and listed as Ventless Firebox Enclosures for Gas-Fired Unvented Decorative Room Heaters to ANSI Z21.91.

APPROVED GAS LOGS: These appliances are listed for use ONLY with Vent-Free Gas Log Room Heaters listed to ANSI Z21.11.2 which have an input not to exceed 40,000 BTU/HR.



©Lennox Industries Inc. 2009
Visit us at www.Lennox.com, or contact us at 1-800-9-LENNOX.
785185M 12/09



All Superior Universal Vent-Free Fireboxes have a 20-year limited warranty.