

DIRECT-VENT FIREPLACES Tahoe Deluxe DVD36FP

Spec Sheet



GLASS VIEWING AREA

30 1/2" W x 20" H

ACTUAL DIMENSIONS

37" W x 32 3/4" H x 16 3/8" D

INCLUDES

• 5-piece Ceramic Fiber log set

REQUIRES

• Fireplace Barrier Screen or Door Set and Frame with Barrier Screen


TECHNICAL INFORMATION


- Maximum heat output: 20,000 BTU (LP, Nat)
- Efficiency Rating:
- 56.80% A. F. U. E.
- 55.80% P4
- Weight: 102 lbs.
- Clearances:
- Side Wall: 0"
- Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- Vent Size: 4 x 6 inch


FIELD INSTALLED ACCESSORIES


- Liners: Aged Brick, Black Porcelain, Herringbone Brick, Stacked Limestone
- Barriers: Door Frame with Matte Black Barrier, Matte Black Barrier
- Decorative Doors & Frames: Arch, Rectangle, Mission Arch and Mission Rectangle

DVD36FP










Back	0 (0 mm)	
Side	0 (0 mm)	
Floor	0 (0 mm)	
Top Stand-off	0 (0 mm)	
Top Framing Edge	3 (76 mm)	
SEE MANTLE CHART FOR MINIMIUM HEIGHT OF MANTLE ABOVE UNIT FINISHED WALL (COMBUSTIBLE) NON-COMBUSTIBLE FIRST 6" (SEE MAGNIFIED VIEW) TOP FRAMING LEDGE GLASS FRONT—	STAND OF (152mm) H ABOVE TOP. FIREPLACE NAILING FLANGES	

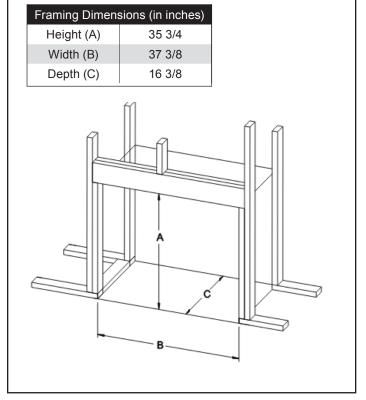

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.


Member of the following industry associations:

















Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com