DRC2000 SERIES MERIT SERIES DIRECT VENT FIREPLACES





The DRC2000 Series offers excellent value without compromising on quality or design. These fireplaces offer an array of standard features, increased performance and state of the art technology to ensure many years of beauty and warmth.

FEATURES

- Available in a dedicated top or rear flue configuration (45" model is a combo top/rear)
- 🔸 Standard black interior with black glass media
- 🤞 Durable powder-coat finish creates scratch-resistant surfaces and carefree handling
- All models are heater-rated with increased heat efficiencies and lower operating costs
- 6 Clean face heat circulating design allows an optional blower


Built-in barrier for added safety

🦸 Ignition systems available in either millivolt or energy saving electronic ignition with seamless battery back-up

Operates during power outage

4 20 year limited warranty

APPLIANCE SPECIFICATIONS

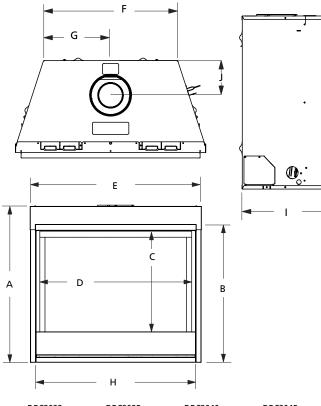

	DRC2033	DRC2035	DRC2040	DRC2045
А	30-1/8"	32-1/8"	37-1/8"	37-1/8"
В	26-1/4"	28-3/4"	33-1/4"	33-1/4"
С	18-5/16"	22-1/4"	25-3/4"	25-3/4"
D	30-1/2"	32-3/8"	37-3/8"	42-3/8"
Е	33-5/8"	35-1/4"	40-1/4"	45-1/4"
F	21-7/8"	25"	30"	35"
G	10-15/16"	12-1/2"	15"	17-1/2"
Н	31"	32-7/8"	37-7/8"	42-7/8"
I	14"	17"	17"	17"
J	5-3/4"	6-7/8"	6-7/8"	6-7/8"

FRAMING SPECIFICATIONS

	DRC2033	DRC2035	DRC2040	DRC2045
WIDTH	33-3/4"	35-1/4"	40-1/4"	45-1/4"
HEIGHT	33-1/4"	35-1/4"	40-1/4"	40-1/4"
DEPTH	14-1/2"	18"	18"	18"

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.


OPTIONAL ACCESSORIES

Glass Media










Reflective Blue



Goldfinger

Copper

ADDITIONAL OPTIONAL ACCESSORIES

Choice of blower with multiple control options

Remotes & wall mounted controls

On the Cover: DRC2035 shown with Reflective Black Glass Media and black interior.

FIREPLACE EFFICIENCIES								
MODEL	FUEL	BTU/HR	P4/ENERGUIDE*	AFUE**				
DRC2033	LP	10,000	60.4%/64.8%	64%				
DRC2033	NG	12,000	60.4%/64.8%	64%				
DRC2035	LP	12,000	61%/65%	65.5%				
DRC2035	NG	14,000	61%/65%	65.5%				
DRC2040	LP	15,000	62%/65%	65.5%				
DRC2040	NG	16,000	62%/65%	65.5%				
DRC2045	LP	19,000	63%/66%	65%				
DRC2045	NG	20,000	63%/66%	65%				

*Intermittent ignition systems. Millivolt/Electronic.

**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.





EUROPEAN COPPER





785495M 04/14

www.SuperiorFireplaces.us.com

Visit us online



