

**DUCATI HYPERMOTARD
SARGENT WORLD SPORT PERFORMANCE SEAT
INSTALLATION GUIDE**

Note

You ***MUST*** use the supplied Sargent hardware bolt and washer set (***NOT*** the OEM hardware). The Sargent bolt and washer set is 'held captive' in the World Sport Performance Seat via a plastic tab on the underside. Remove this tab before installing the seat.

Installation

Per the owner's manual, remove the stock seat, and store in a secure location.

To install the World Sport Performance Seat, grasp the seat at the front with two hands, on each side (fig 1). While aligning Catch Bolts "A" with Receivers "B" (fig 2), use gentle inward and forward pressure and slide the seat into place. Verify that the Catch Bolts "A" and Receivers "B" are engaged.

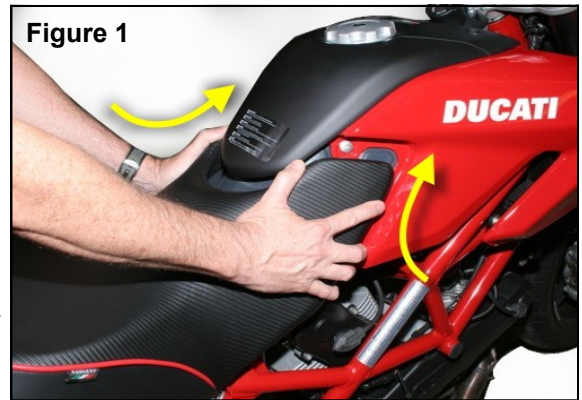


Figure 1

Using a 4 mm Allen Wrench, align and tighten the rear bolt.

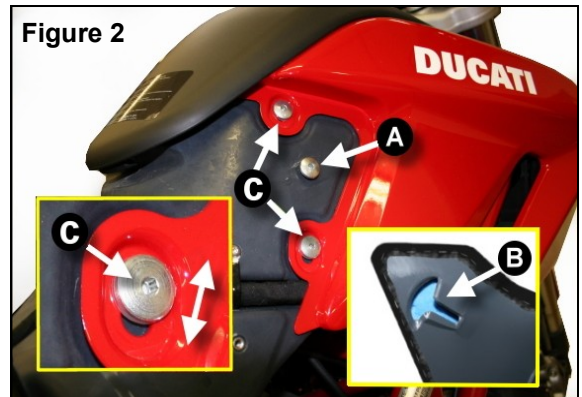


Figure 2

Note

The receiving nut (slotted mount) is adjustable, adjust as needed for proper alignment. (fig3)

The OEM front panels are "Slot Mounted" which provides some adjustment for optimal seat to panel fit. (See figure 2 Item "C").

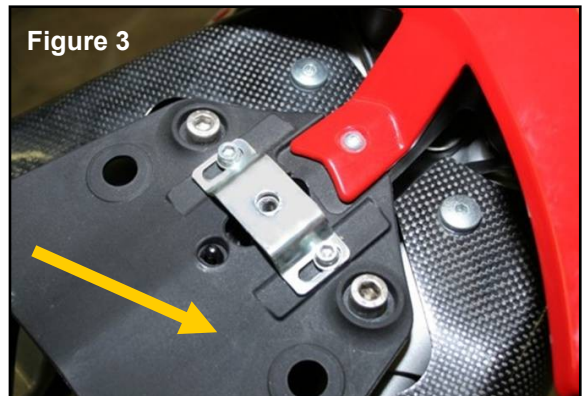


Figure 3