

**DUCATI 749 / 999 2003+
SARGENT WORLD SPORT PERFORMANCE SEAT
INSTALLATION GUIDE**

Installation Prep

Before installing the seat, transfer the rubber insulator from the stock seat (if present) to the World Sport Performance Seat on the left and right.



Note


Some stock seats do not have this rubber part. If your stock seat does not have this part, disregard this notice.

Installation

First, to remove the stock seat, use a 5mm hex tool to remove the two decorative side panels (left and right).

Use a 5mm hex tool to remove the two adjustment bolts located under the body work (left and right).


Grasp the tail section as shown and carefully lift up, releasing the compression fit pin fastener (A) that holds the tail to the rear sub-frame.

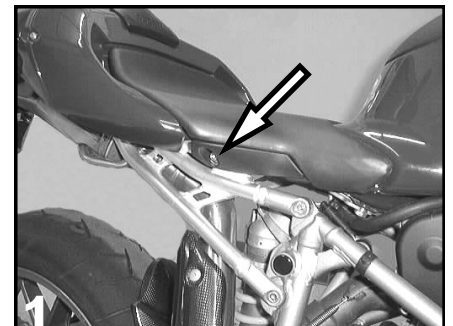


Note

This may require a firm tug to release the pin from its grommet.

Place a folded bath towel (B) or similar material under the body for extra support and protection. Then, using a 17mm socket, remove the large center bolt under the seat.

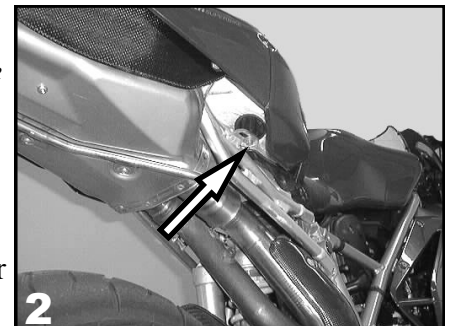

Place the tail section on a soft surface. Using a 4mm hex tool, remove the four bolts marked (C-F).

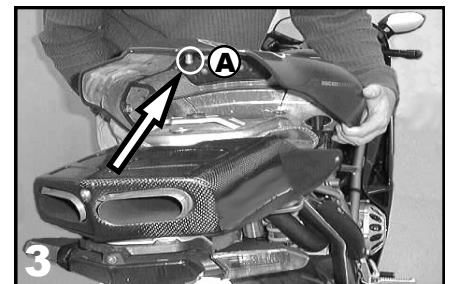

To complete the installation of the World Sport Performance Seat, reverse the above procedure.

