

Superior
FIREPLACES®
Our name is our promise.



The DRL6000 Series linear direct vent gas fireplace is at home in both contemporary and transitional spaces. The expansive ceramic glass opening provides an exceptional view of the fire while the floor lighting allows you to enhance the mood. The DRL6000 is a fully featured fireplace that comes complete with a heat circulating blower and multi-function remote for the ultimate in comfort and control.



FEATURED DRL6060 shown with see-through kit and platinum crushed glass

- 🔥 Available in a 60" linear configured model
- 🔥 See through conversion kit available to allow viewing from two living spaces
- 🔥 HeatFlo kit option allows heat to be directed above heat sensitive wall hangings
- 🔥 Electronic ignition with battery backup provides continued operation in the event of a power outage
- 🔥 Six flame settings with up to a 30% turn down for precise heat control
- 🔥 Outstanding heating efficiency for increased comfort and lower operating costs
- 🔥 Clean-face design with integrated tile stops for easy finishing
- 🔥 Ceramic glass for optimum heat transfer and a protective screen*
- 🔥 Factory installed blower with six speed settings to fine tune your heating needs
- 🔥 Black porcelain liner interior for a reflective view of the fire
- 🔥 Platinum crushed glass media included with several optional colors available
- 🔥 Mood enhancing floor lighting enhances the fireplace interior with or without a fire
- 🔥 Multi-function remote included (IPI/CPI, thermostat, flame height, blower, lighting)
- 🔥 20 year limited warranty

*All applicable models comply with ANSI Z21.88 barrier requirements.



INTERIOR

Liner



Black Porcelain
Interior
(Standard)




Reflective Black
Glass Liner

Media




Platinum
Crushed Glass
(Standard)



Reflective Blue
Crushed Glass



Reflective Black
Crushed Glass



Copper
Crushed Glass



High-Definition
Driftwood Log Set



River Rock Assorted
Set

SEE-THROUGH KIT



See-Through Kit

TRIM



Black Perimeter
Trim Kit

REMOTE



On/Off Thermostat
Remote (Standard)

- Manual On/Off and Thermostatic Modes
- 6 Flame Height Settings
- 6 Interior Light Settings
- 6 Blower Speed Settings


HEATFLO KIT

Protect heat sensitive televisions, artwork and other decorative wall materials. No blower required, the HeatFlo kit works through natural convection to redirect heat from the fireplace upward through hidden ductwork and out through a sleek horizontal vent. Walls stay cooler and heat flows more evenly through the room for a comfortable fireplace experience.

- TV & Artwork can be placed above the fireplace
- Helps protect heat sensitive wall facing materials
- Improves convective heat circulation in the room
- No electricity or blower required for operation



APPLIANCE SPECIFICATIONS

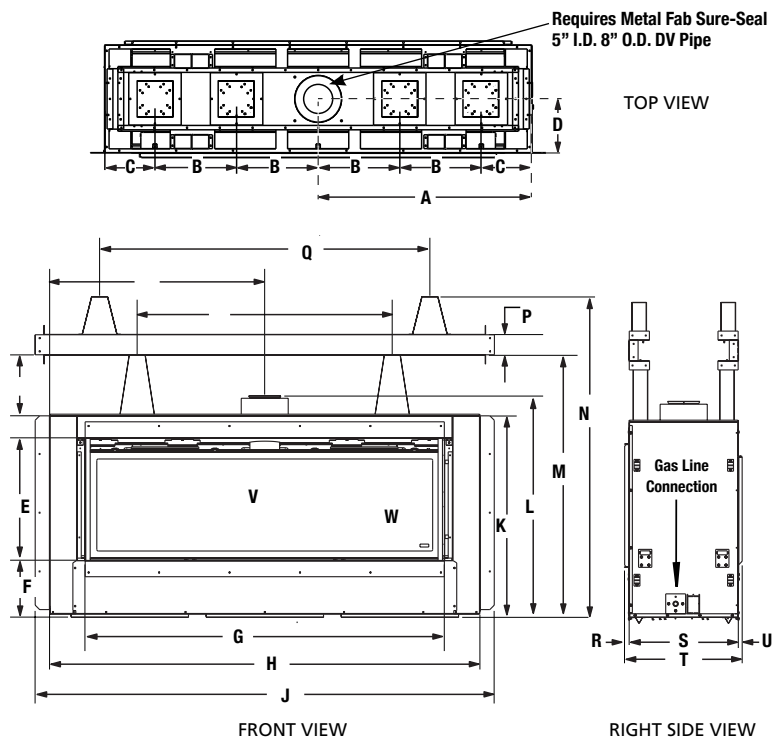

DRL6060

A	36-5/8"	H	73-1/4"	Q	43-1/2"
B	14"	J	78-1/4"	R	3/4"
C	8-5/8"	K	34-3/8"	S	18-1/2"
D	9-3/8"	L	37-3/4"	T	19-1/4"
E	20-7/8"	M	44-5/8"	U	5/8"
F	9-3/4"	N	54-5/8"	V	57-1/8"
G	61-1/4"	P	3-1/2"	W	15-1/2"

- REFER TO INSTALLATION MANUAL FOR ALL REQUIRED CLEARANCES TO COMBUSTIBLES.

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
DRL 6060	NG	47,000-32,000	48.4	39.7
DRL 6060	LP	41,000-32,000	48.7	41.8



IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

FRAMING SPECIFICATIONS

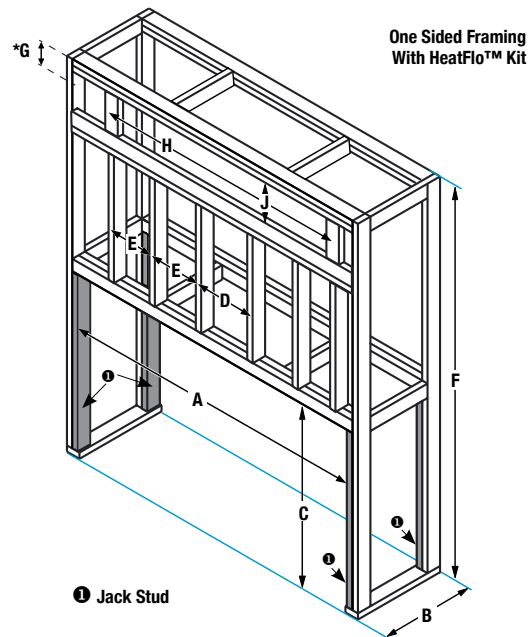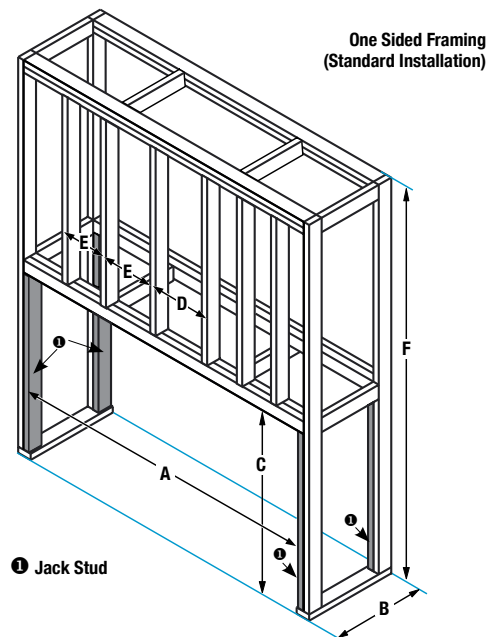

DRL 6060 FRAMING DIMENSIONS

60" Models	A	B	C	D	E	F	*G	H	J
One Sided Framing	75-1/2"	19-1/2"	54-3/4"	16"	12"	96"	6"	64-14"	7-1/2"
One Sided Framing HeatFlo Kit	75-1/2"	18-1/2"	54-3/4"	16"	12"	96"	6"	64-14"	7-1/2"

F. Minimum height from appliance base to ceiling

*G. Minimum Distance from Vent Opening to Ceiling

- REFER TO SPEC SHEET FOR COMPLETE SEE-THROUGH APPLICATIONS AND INSTRUCTIONS.

On the Cover: DRL6060 fireplace with Black Porcelain Interior and Platinum Crushed Glass Media



© 2019 Innovative Hearth Products

785729M 10/19

Visit us online
SuperiorFireplaces.us.com

