











Superior[™]
FIREPLACES
Our name is our promise.



TRADITIONAL

The VRT4000Z Series Vent-Free gas fireplace systems combine hand-painted concrete logs, dancing yellow rear flame, glowing center ceramic fiber log and flickering ember bed for a realistic fireplace appearance.

FEATURES




-  Available in 32" and 36" models
-  Millivolt (Remote-ready) or Electronic Ignition
-  99.9% heating efficiency
-  Two tier burner with ember bed
-  Highly detailed concrete logs
-  Factory installed heat activated variable speed blower
-  Durable textured powder-coat paint exterior/Std. black painted interior
-  Integrated log grate
-  Illuminated touch screen multi-function remote control (Std. w/all elect. ignition models)
-  20 year limited warranty

INTERIOR LINER OPTION



Vintage

APPLIANCE SPECIFICATIONS

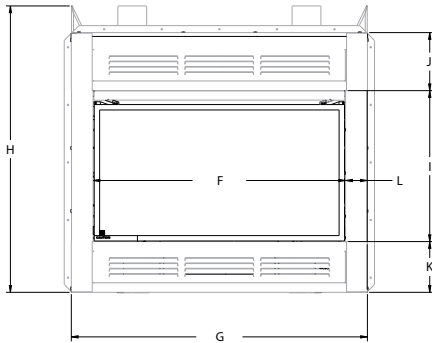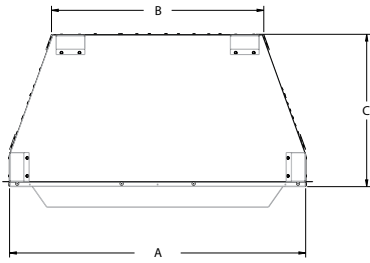

VRT/VCT4032

VRT/VCT4036

A	34-1/2"	41-1/8"
B	22-1/2"	25"
C	16-3/4"	21-3/16"
D	3-1/2"	2-1/2"
E	6-13/16"	8-3/8"
F	29-3/8"	35-1/16"
G	34-1/2"	41-1/8"
H	36-1/2"	40-1/4"
I	18"	21"
J	7"	8"
K	7"	7"
L	2-1/2"	3"
M	3-1/2"	2-1/2"
N	6-13/16"	7-1/2"
O	10-1/2"	9-1/2"
P	3-1/4"	3-1/4"

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Built to ANSI Z21.11.2 standard and approved by PFS Test Laboratories. Consult your distributor for local fireplace code information.

OPTIONAL ACCESSORIES



Wood mantels in a variety of styles and finishes



Multi-function remote control
(standard with electronic ignition only)

ADDITIONAL ACCESSORIES

- A. Perimeter trim kits in a variety of finishes
- B. Remote control for Millivolt (Remote-ready) models
- C. Wall switch kit or wall thermostat available
- D. Outside air kits

FRAMING SPECIFICATIONS

	VRT/VCT4032	VRT/VCT4036
WIDTH	34-7/8"	41-1/2"
HEIGHT	36-3/4"	40-1/2"
DEPTH	16-1/4"	20-3/4"

FIREPLACE EFFICIENCIES

MODEL	FUEL	BTU/HR	AFUE*
VRT/VCT4032 (Millivolt)	NG	17,000-25,000	99.9%
VRT/VCT4032 (Millivolt)	LP	17,000-25,000	99.9%
VRT/VCT4036 (Millivolt)	NG	20,000-33,000	99.9%
VRT/VCT4036 (Millivolt)	LP	20,000-33,000	99.9%
VRT/VCT4032 (Electronic)	NG	20,000-25,000	99.9%
VRT/VCT4032 (Electronic)	LP	20,000-25,000	99.9%
VRT/VCT4036 (Electronic)	NG	22,000-33,000	99.9%
VRT/VCT4036 (Electronic)	LP	22,000-33,000	99.9%

*Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.



© 2014 Innovative Hearth Products
785428M 06/14

Visit us online



SuperiorFireplaces.us.com

