




SV7QLCD-T

Onscreen Menu Guide

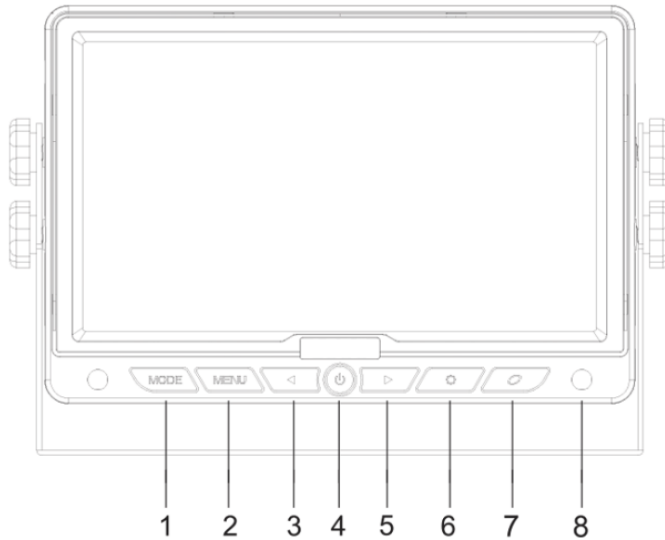

Key Switch	Description
1 - Mode	Use on T4 (not used on "T") model to change grid view and number of cameras displayed on screen. This option works when more than one of the monitor's video inputs is used.
2 - Menu	Adjust Brightness, Contrast, Mirror Image (ON/OFF), Resolution mode (16:9 or 4:3), Language, Back Delay (return to default screen 0 to 5 seconds after alarm triggered – T4 model only), Guide Line (ON/OFF), Reset.
3- Left Arrow	Used to navigate through menu and adjust settings (brightness, contract, etc)
4 – Power Button	Turn monitor On and OFF.
5 – Right Arrow	Used to navigate through menu and adjust settings (brightness, contract, etc)
6 – Brightness	Choose from 5 pre-set screen brightness settings.
7 - Mirror	Flip screen image horizontally.

Menu Button Features:

1. Brightness setting



2. Contrast setting



3. Color Balance Setting



4. Aspect Ratio Setting



5. Language Setting



6. Mirror Setting (on/off)



7. Back Delay



Back Delay option is only applicable with SV7QLCD-T4 model since there are total of 4 input channels. If you have cameras directly connected to the LCD-T4 monitor and are using the T4 triggers, then you may set a delay time of how long the camera channel will stay active (i.e. how long the reverse camera will stay on the monitor after the car is taken out of reverse).