

IMPORTANT:

Read ALL instructions carefully before beginning installation.

Tools Required:

Philips Screw Driver

REAR SEAT INSTALLATION

Step 1: Gently flex the front bottom corners out to clear the base pan edges and fully engage the unit aligning the holes on the bottom with the corresponding holes on main seat base.

Step 2 : Fasten using the four supplied screws and lock washers.

ALTERNATE MOUNT:

Note, some rear seats come with integrated front tabs A. If this is the case with your particular product, engage the front tabs as illustrated, then use only the rear two bolts and washers to compete installation.

STORAGE POD INSTALLATION

Step 1: Lower the POD accessory into place, engaging the front tongues, and gently tucking the back edge of the front seat under the leading edge of the POD.

Step 2: Align and engage the two 1/4 turn fasteners and secure with a Philips screwdriver.

Caution: Always verify the connection by pulling up on the POD to be certain it is secure!


POD LIGHT, BATTERIES AND LATCH

Two CR2430-3V batteries included. To activate **POD** light, remove clear plastic tab between batteries. To replace batteries, remove two Phillips screws B remove cover and circuit board C then remove and replace batteries D, negative side up. Reassemble components as listed above in reverse order.

IMPORTANT:


Storage POD light is tilt activated. For long term storage, remove batteries or store **POD** in a horizontal position.

MODULAR SEAT SYSTEM INSTRUCTIONS:

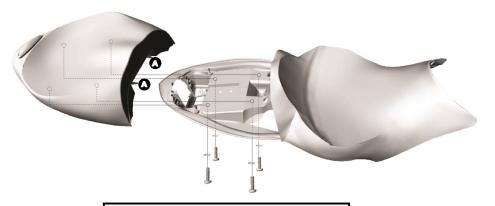

FOR BACKREST INSTALLATION: See separate instructions supplied with backrest product.





Storage POD Latch and Lock

UNLOCK

While standing at the rear of your motorcycle, slide the World Sport logo latch to the left to open your Storage POD. Locking the Storage POD will prevent the latch from opening the POD.

LOCK