

# RUBY SERIES

Direct Vent Gas Fireplace Inserts



# CONVERT YOUR HIGH-MAINTENANCE WOOD FIREPLACE TO SIMPLIFY YOUR LIFE



Ruby 30 shown with contemporary rectangular door and surround in Bronze, and optional Cottage Red interior

## RUBY SERIES DIRECT VENT GAS FIREPLACE INSERTS

Ruby series gas inserts make relaxing simple. Convert your high-maintenance wood fireplace into a source of warmth and enjoyment.

Realistic split logs and flames give the Ruby series the ambiance and look you expect, while removing the effort wood fireplaces require.

### Ruby Quick Look


- Strikingly realistic split logs and flames
- Simple start-up and use for continual enjoyment
- Adjust flame, heat and ambiance
- Heat with more than 70% efficiency
- Available in 30" or 35" models
- Up to 35,000 BTUs

# FOUR EASY STEPS TO UPGRADE YOUR EXISTING WOOD-BURNING FIREPLACE

1. Measure your existing fireplace
2. Select your insert
3. Choose your surround
4. Customize your insert

## STEP 1 Measure Your Existing Fireplace –

The height, width and depth of the existing fireplace opening is needed to ensure an appropriately sized insert is selected.

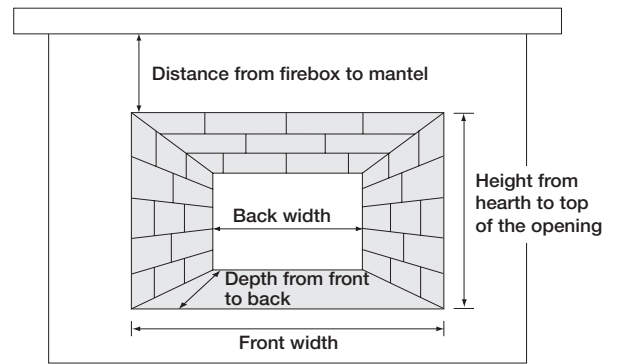

## STEP 2 Choose Your Insert

- Consider how your insert will be used. Room size, heating needs and usage frequency all come into play.



### MDVI30

- 30" viewing area
- Up to 30,500 BTUs
- Fan and remote standard



### MDVI35


- 35" viewing area
- Up to 35,000 BTUs
- Fan and remote standard



The RC200 remote and wall dock come standard with the Ruby insert. The remote allows for adjustable flame height, standing pilot mode, child safety lock, and memory settings.


**STEP 3 Choose Your Surround –** Surrounds fill the gap between the fireplace insert and existing fireplace opening. Choose from three sizes and two finishes for a unique look.

SURROUND	MDVI35	MDVI30
Small	42" x 29"	40" x 27"
Medium	44" x 32"	42" x 30"
Large	48" x 32"	44" x 32"

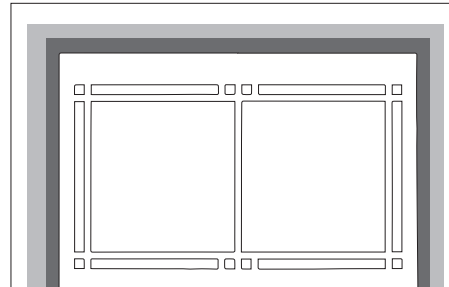

- Small Surround
- Medium Surround
- Large Surround

**STEP 4 Customize Your Insert –** Select options to complete your look.

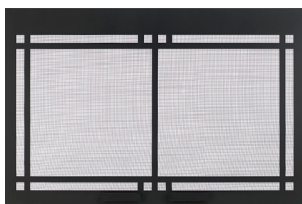

Contemporary Rectangular Door

### Door Finishes



Black




Bronze

### Optional Interior Brick Panels



Cottage Red




Tavern Brown

## Termination Caps

A termination cap finishes your gas insert with a clean, upscale look. These durable caps also protect venting components and ensure safe exhaust flow.



Round Termination Cap

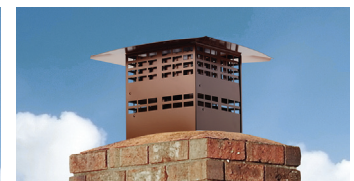

Square Termination Cap  
(available in Black or Copper finish)

## IntelliFire™ Plus Ignition System

The IntelliFire Plus Ignition System (IPI Plus) takes this technology to the next level with more safety and memory settings, and a programmable wireless remote control. The wireless remote is required to control standing pilot mode, child safety lock, and memory settings.


## Direct Vent Technology

Direct Vent fireplaces remove 100% of combustion exhaust and odors from your space. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.

## TECHNICAL SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		VIEWING AREA (E X F)	BTU/HR INPUT
	UNIT (A)	MINIMUM OPENING	UNIT (B)	MIN. OPEN	UNIT (D)	MINIMUM OPENING	UNIT (C)	MINIMUM OPENING		
MDVI30IN	30-5/8" (778mm)	31-1/8" (791mm) (std. surround) 29-1/2" (749mm) (deep surround)	20-3/16" (513mm)	20-3/4" (527mm)	20-7/16" (519mm)	20-3/4" (527mm) (std. surround) 19-3/8" (492mm) (deep surround)	14-5/8" (371mm)	14-7/8" (378mm) (std. surround) 14" (356mm) (deep surround)	27-1/2" x 12-3/16" (699mm x 310mm)	30,500
MDVI35IN	34-5/8" (879mm)	35-1/8" (892mm) (std. surround) 33-1/2" (851mm) (deep surround)	23-7/16" (595mm)	24" (610mm)	24-1/16" (611mm)	24-3/8" (619mm) (std. surround) 23" (584mm) (deep surround)	15-11/16" (398mm)	16" (406mm) (std. surround) 15-1/8" (384mm) (deep surround)	31-5/8" x 15-11/16" (803mm x 398mm)	35,000

Note: Refer to installation manual for zero clearance install guidelines.

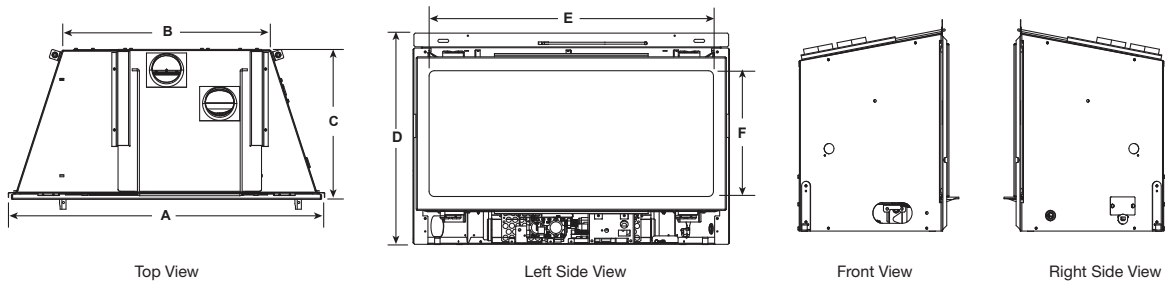

Note: Order a conversion kit when using LP.

## U.S. Efficiencies

### Steady State

Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

### AFUE

AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	MDVI30IN	MDVI35IN
Steady State	70% (NG) / 73% (LP)	74% (NG) / 75% (LP)
AFUE	68% (NG) / 71% (LP)	71% (NG) / 73% (LP)

RATING	MDVI30IN	MDVI35IN
EnerGuide (CSA P4.1-02)	70% (NG) / 71% (LP)	72% (NG) / 73% (LP)


## Canada Efficiencies

### EnerGuide (CSA P.4.1-02)

EnerGuide is the official Government of Canada mark associated with the labelling and rating of the energy consumption or energy efficiency of specific products.



For more information about Majestic efficient and environmentally friendly products, please visit [www.majesticproducts.com](http://www.majesticproducts.com)



## Limited Lifetime Warranty<sup>1</sup>

The strongest in the industry, Majestic provides a limited lifetime warranty on gas-burning products of the most important aspects: firebox and heat exchanger.

Your Majestic Dealer:

1: For full warranty details go to [majesticproducts.com](http://majesticproducts.com). The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images. Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit [www.majesticproducts.com](http://www.majesticproducts.com). © 2016 Hearth & Home® Technologies