

## ZDV3318 & ZCV3622

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY



## ZDV3318 & ZCV3622

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE

Enjoy the elegance and warmth of glowing embers and dancing flames around our traditional oak log set. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value. With a fully sealed combustion chamber there is no pollution spillage to depreciate the indoor air quality of your home.



#### STANDARD FEATURES\*

- Hi/low Millivolt or IPI valve system, will operate during power failures
- Proprietary burner, with realistic burn
- Mobile Home, Bedroom and Bed Sitting Room approved
- Safety Screen Barrier\*



Safety Screen Barrier

#### **OPTIONAL FEATURES**

Designer Clean View Circulating Kit - (ZDV3318 only) No louvers required

#### Grills- (ZDV3318 only)

Available in Black, and Classic Series Black with Antique, Chrome, or Polish Brass accents

### Surrounds Wide (Louvered Units) - (ZDV3318 only)

Available in Black

Coverage • ZDV3318 - 31 3/16" h x 36 5/8" w

### Surround - Black - (ZCV3622 only)

Covers Framing Dimensions (39" w x 34 1/16" h)

#### Fan Kit

Heat activated with variable speed control

### **Wall Mount Thermostat**

Standard On/Off or Programmable 5 day (weekday) and 2 day (weekend)

#### **Remote Control**

On/Off, Thermostat On/Off, Thermostat On/Off modulating

#### Liners

Porcelain Reflective Liner. Metal Brick Liner

LOGC50 Oak Log Set (ZDV3318 only) LOGC51 Oak Log Set (ZCV3622 Only)



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY


<sup>\*</sup> All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier.

# CLEAN VIEW OR LOUVERED FIREPLACES

Model Fuel Input Max. Input Min. FE (P.4.1-02) ZDV3318N/NE Natural 19,000 BTU 12,100 BTU 53.4% ZDV3318LP/LPE Propane 18,000 BTU 11,900 BTU 51.4%

ZCV3622N/NE Natural 18,000 BTU 13,000 BTU 61.7 / 64.5% ZCV3622LP/LPE Propane 18,000 BTU 15,000 BTU

63.2 / 66.2%

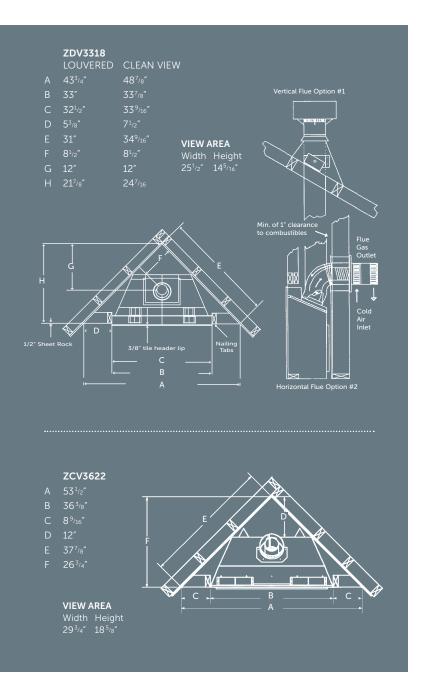

#### **UNIT AND FRAMING SPECIFICATIONS (IN.)**

Top Flue Models	Height Actual	Height Framing	Width Actual	Width Framing	Depth Actual	Depth Framing
LOUVERS (ZDV3318 model only)						
ZDV3318	301/2"	31"	$32^3/8$ "	33"	153/4"	151/4"
CLEAN VIEW						
ZDV3318* ZCV3622	30 <sup>3</sup> /8" 37 <sup>1</sup> /8"	33 <sup>3</sup> /8" 37 <sup>1</sup> / <sub>4</sub> "	33 <sup>9</sup> / <sub>16</sub> " 36"	33 <sup>7</sup> /8" 36 <sup>3</sup> /8"	18 <sup>3</sup> /16" 17 <sup>7</sup> /16"	
*ZDV3318 and Z33CVCK Clean View Kit						





Enjoy an incredible line of options and styles – from contemporary to classic – plus the beauty and pleasure of a cozy fire.



Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation erification: The models ZDV3318 and ZCV3622 are certified for USA/Canada. Certified to: ANSI 221.88-2014, CSA 2.33-2014, CSA 2.17-M91 (R2009) Vented Gas Fireplace Heaters.