

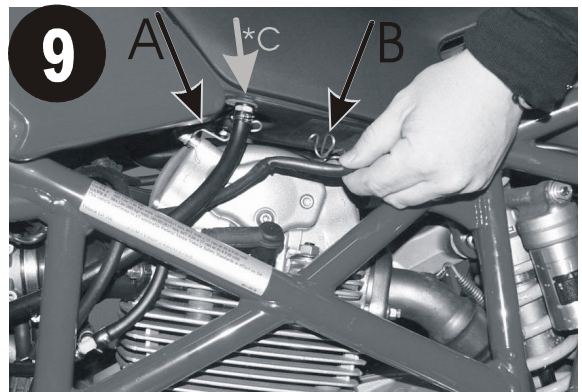


8 Pull right side panel straight off its four pressure studs. Next, remove the two 4mm screws from the top tail section panels. Both panels slide straight back off the studs.


Remove the 5mm screw directly under the seat, in the wheel well.

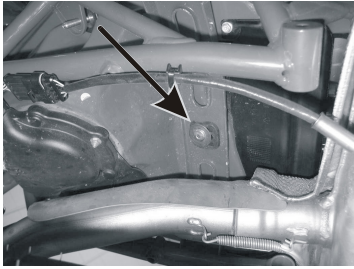


On left side, remove wire group from the two support clips A & B . *NOTE*; do not remove gas line!! *C

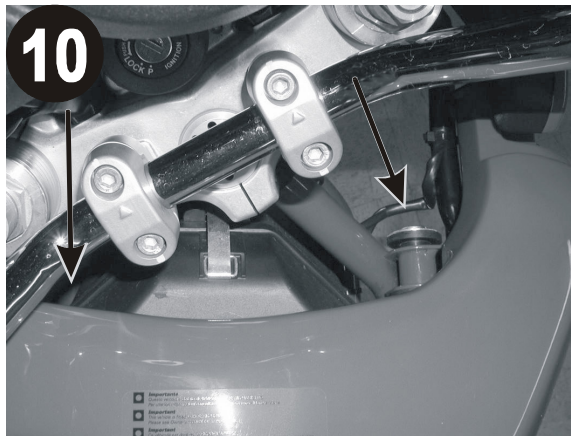


Remove the two 5mm stud bolts at front of tank.

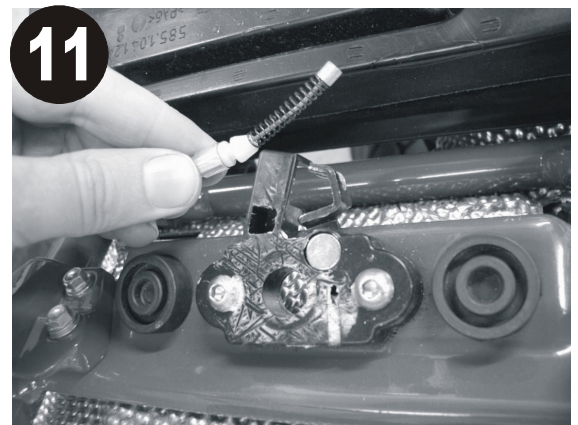

Remove the cable from both latch clips.

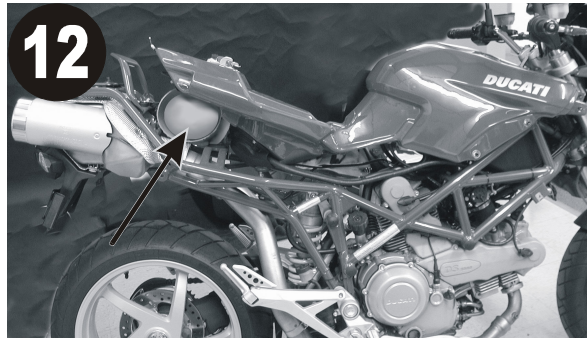

Check all connecting lines for enough slack to lift up freely. Don't force! After raising up the tail section, prop up with a sturdy brace.

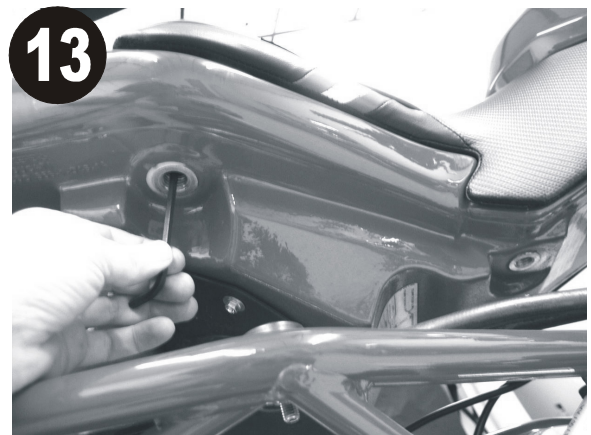

Remove all four 6mm screws from the bolt wells and replace to install the World Sport Seat.



To remove and replace seat; spread front ears and rotate front of seat as indicated.

SARGENT
 Cycle Products, N.A.
 1-800-749-7328
 +904-354-4531 PH
 +904-354-7979 FX
 M-F, 8-5 Eastern
www.SargentCycle.com