




INSTALLATION AND OPERATION INSTRUCTIONS

BIS® ULTIMA-1

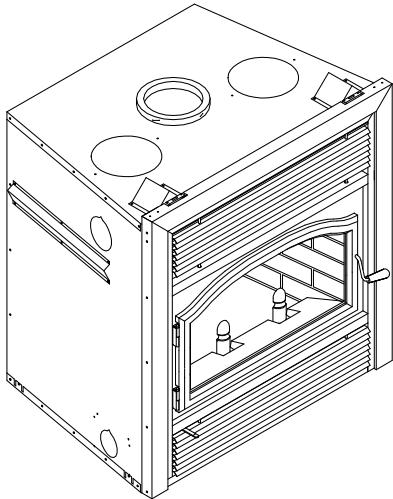

EPA Wood-Burning Fireplaces
P/N 506128-23 REV. N 05/2013

MODEL

BIS Ultima-1

This installation manual will enable you to obtain a safe, efficient and dependable installation of your fireplace system. Please read and understand these instructions before beginning your installation.

Do not alter or modify the fireplace or its components under any circumstances. Any modification or alteration of the fireplace system, including but not limited to the fireplace, chimney components and accessories, may void the warranty, listings and approvals of this system and could result in an unsafe and potentially dangerous installation.

IHP wood-burning fireplaces are designed for use as a supplemental heater. They are not intended for continuous use as a primary heat source.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

An French manual is available upon request. Order P/N 506128-24.

Ce manuel est disponible en francais, simplement en faire la demande. Numéro de la pièce 506128-24.

Fireplace, also for use in mobile or manufactured homes with solid fuel only.

| | |
|---|---|
| | ⚠ WARNING |
| | <ul style="list-style-type: none"> • Hot! Do not touch! The glass and surfaces of this appliance will be hot during operation and will retain heat for a while after shutting off the appliance. Severe burns may result. • Carefully supervise children in the same room as appliance. |
| <ul style="list-style-type: none"> • If small children are present in the home, it is recommended that this appliance be fitted with an adjustable safety gate or barrier screen. | |

| |
|---|
| ⚠ WARNING |
| <ul style="list-style-type: none"> • The fireplace cannot be operated without a door or firescreen. Consult your dealer to select the correct door or firescreen. • Important! To assure proper alignment of glass doors: Install this fireplace in a square and plumb condition, using shims as necessary at sides and/or bottom. • Install the fireplace only as described in these instructions. |

| | |
|--|--|
| | <p>Listed to standards: ULC-S610 & UL-127 Report No. 3011202 EPA Cert. No. 537</p> |
|--|--|

| | |
|--|--|
| | <p>We recommend that our woodburning hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Woodburning Specialists or who are certified in Canada by Wood Energy Technical Training (WETT).</p> |
| | <p>Wood Energy Technical Training www.wettinc.ca</p> |

IMPORTANT! GENERAL SAFETY PRECAUTIONS. READ AND UNDERSTAND THESE SAFETY RULES BEFORE YOUR FIRST FIRE.

⚠ WARNING

THE FIREPLACE MUST BE OPERATED WITH THE DOOR FULLY OPENED OR DOOR FULLY CLOSED. IF THE DOORS ARE LEFT PARTLY OPENED, GAS AND FLAME MAY BE DRAWN OUT OF THE FIREPLACE OPENING, CREATING RISKS OF BOTH FIRE AND SMOKE. IF THE UNIT IS OPERATED WITH THE DOORS FULLY OPENED, THE OPTIONAL FIRE SCREEN MUST BE USED.

⚠ WARNING

NEVER use gasoline, gasoline-type lantern fuel, kerosene, charcoal lighter fluid, naphtha, engine oil or similar liquids to start or "freshen up" a fire in this fireplace. Keep any flammable liquids a safe distance from the fireplace at all times.

⚠ WARNING

THIS FIREPLACE HAS NOT BEEN TESTED WITH AN UNVENTED GAS LOGS OR A FIREPLACE INSERT. TO REDUCE RISK OF FIRE OR INJURY, DO NOT INSTALL AN UNVENTED GAS LOG SET OR FIREPLACE INSERT OR OTHER PRODUCTS NOT SPECIFIED FOR USE WITH THIS FIREPLACE.

⚠ WARNING

Never leave your fireplace unattended while it is burning.

⚠ WARNING

To avoid the risk of damaging fireplace materials and increasing the risk of fire, do not use the fireplace to cook or warm food.

⚠ WARNING

Use care when selecting window treatments for windows located near the fireplace. Avoid using combustible flowing window treatments such as curtains on nearby windows that are of sufficient length to be blown in front of an open flame when the window is opened. Keep any combustible furniture, materials or decorative pillows at least 48" (1219 mm) from the front fireplace opening.

⚠ WARNING

Never modify or alter your fireplace system in any way. To do so may create a potential fire hazard and void the limited warranty, listings and approvals of this system.

⚠ IMPORTANT

When burning wood, use SOLID NATURAL DRY WELL-SEASONED WOOD ONLY. Hardwoods are recommended (softwoods tend to burn very quickly).

- **DO NOT** burn treated wood, charcoal, coal, trash, cardboard, driftwood, woods dipped in tar, Christmas tree greens, pitch, pine tar, creosote, chemical chimney cleaners, flame colorants, polystyrene packaging, wood products with synthetic binders (i.e. plywood). Plywood, lumber and other misc. materials can produce abnormally high temperatures, sputtering and smoking fires and may contain hazardous chemicals to treat insects and fungus.

- Burning unapproved fuels can produce excessive temperatures, beyond the design capabilities of the fireplace and may produce excess sparks or may contain hazardous chemicals. Burning unapproved fuels can result in a chimney fire, a house fire, personal injury, death or loss of property.

⚠ WARNING

Never leave children unattended when there is a fire burning in the fireplace.

⚠ WARNING

Always ensure that the air inlet to the fireplace is free from debris and any other obstructions that can block the entrance of air.

⚠ IMPORTANT

WHEN INSTALLED IN A MOBILE OR MANUFACTURED HOME:

- Mobile or manufactured home installations must be installed in accordance with the requirements of the Department of Housing and Urban Development (HUD) "Mobile Home Construction and Safety standards" for US or Canada Mortgage and Housing Corporation (CMHC) for Canada.

- The fireplace must be fastened to the floor by unfolding and screwing the small tabs on both sides at the bottom of the fireplace.

- It is necessary to have access openings, for inspection purpose only, into built-in enclosures surrounding the fireplace installation. Such openings to require a household tool for access.

- The vapor barrier of the mobile home shall be as close as possible of the location where the chimney assembly penetrates the ceiling and roof structure with no interference to the required clearance to combustible material.

- When the mobile or manufactured home has a flat roof, the Attic Radiation Shield must be installed from below going through the roof (See *Figures 23b and 23d*).

- **Warning:** Do not install in a sleeping room.

- **Caution:** The structural integrity of the manufactured home floor, wall, and ceiling/roof must be maintained.

⚠ WARNING

Neither the manufacturer nor the seller warrants "smoke free" operation nor are we responsible for inadequate system draft caused by mechanical systems, general construction conditions, inadequate chimney heights, adverse wind conditions and/or unusual environmental factors or conditions beyond our control.

CONGRATULATIONS!

When you purchased your new wood fireplace, you joined the ranks of thousands of individuals whose answer to their home heating needs reflects their concern for aesthetics, efficiency and our environment. We extend our continued support to help you achieve the maximum benefit and enjoyment available from your new wood fireplace.

Thank you for selecting an IHP wood fireplace as the answer to your home supplemental heating needs.

TABLE OF CONTENTS

| | |
|---|---------|
| SAFETY RULES and Specifications for | |
| Mobile or Manufactured | |
| Home Installation..... | Page 2 |
| Introduction | Page 3 |
| Parts Required | Page 3 |
| Optional Equipment..... | Page 3 |
| Operating The Fireplace | Page 4 |
| Fuel | Page 4 |
| Combustion Control | Page 4 |
| Refueling For Best Performance | Page 5 |
| Smoking – Causes And | |
| Troubleshooting | Page 5 |
| Important Cautions | Page 5 |
| Maintaining Your | |
| BIS® Ultima-1 Fireplace..... | Page 6 |
| Chimney Maintenance..... | Page 6 |
| Dealing With A Chimney Fire..... | Page 6 |
| Finish Door Casing Care..... | Page 6 |
| Disposing of Ashes | Page 6 |
| Refractory Replacement..... | Page 7 |
| Door Installation | Page 7 |
| Door Adjustment..... | Page 7 |
| Glass Care - Replacement | Page 8 |
| Glass Care - Cleaning | Page 8 |
| Gasket Replacement | Page 8 |
| Fireplace Installation | Page 8 |
| Locating The BIS Ultima-1 Fireplace | Page 8 |
| Framing, Facing And Mantel..... | Page 9 |
| Hearth Extension Requirements | Page 9 |
| Cold Climate Installations..... | Page 9 |
| Fireplace and Framing Dimensions ... | Page 10 |
| Insulated Chase Construction | Page 11 |
| Nailing Flanges..... | Page 11 |
| Facing / Mantel..... | Page 11 |
| Hot Air Ducting Installation | Page 12 |
| Gravity Kit | Page 12 |
| Central Forced Air Kit Installation | Page 13 |
| Outside Air Kit | Page 14 |
| Chimney System..... | Page 15 |
| Chimney Installation Notes | Page 15 |
| Chimney Installation Instructions..... | Page 16 |
| Offset Chimney Installation | Page 17 |
| Angled Wall Radiation Shield | Page 19 |
| Chimney Support Installation..... | Page 20 |
| Chimney Chase And | |
| Multiple Terminations..... | Page 20 |
| Chimney Adaptor | Page 20 |
| Masonry Application Instructions | Page 21 |
| Installation Accessories | Page 22 |
| Replacement Parts | Page 23 |
| Specifications..... | Page 23 |
| Clearances to Combustibles..... | Page 23 |
| Chimney Components Lists | Page 24 |
| Product Reference Information | Page 26 |

THE FIREPLACE INTRODUCTION

The BIS® Ultima-1 wood-burning fireplace is an energy efficient, heat circulating, closed combustion fireplace. You will receive a lifetime of comfort and enjoyment from your fireplace provided it is installed, maintained and operated properly.

- Please read these instructions and retain this manual for future reference.
- Before beginning the fireplace installation, consult the local authorities to obtain your building permit and check your local building codes. Install the fireplace only as described in these instructions and using only IHP components.
- This fireplace has been tested for CAN/ULC S610-M87 and ANSI/UL 127 under report number 3011202. It has also been tested for EPA 40 C.F.R Part 60, section 60.532(b). Certificate number 537.
- The BIS Ultima-1 fireplace is not intended for use with a gas log set. Do not use a fireplace insert or any other product with this fireplace unless it is specified by IHP for use with this appliance. Failure to follow these instructions will void the certification and the warranty of the fireplace and may result in an unsafe installation.
- IHP wood fireplaces are designed for use as a supplemental heater. They are not intended for continuous use as a primary heat source.

PARTS REQUIRED

Fireplace Model BIS Ultima-1

- **Decorative Cast Iron Door - Required (Order Separately - see Page 22)**
- **Outside air kit - Required (Included w/Fireplace)**
- **.6" diameter chimney*** - model ASHT+, S2100+, HT6000+, HT6103+ or AC manufactured by Security Chimneys International™ only, including:
 - Chimney lengths
 - Elbows (where necessary)
 - Associated components as per these installation instructions

OPTIONAL EQUIPMENT

- **Additional Equipment (optional)**
 - AC Chimney Adaptor*
(required if using AC Chimney)
 - AC chimney outside air kit
 - Gravity venting system
 - Panel for clean face option
(only with gravity venting system)
 - Forced Air Kit ①
 - Rigid firescreen
 - Fireplace Blower Kit
 - Blower Speed Control
- ① **Not tested under EPA certification. If installed, this appliance no longer qualifies for EPA certification.**

OPERATING THE FIREPLACE

Fuel

USE SOLID NATURAL WOOD FUEL ONLY. The BIS® Ultima-1 fireplace is designed to work best when fueled with dry seasoned natural wood only. Hardwoods are preferred to softwoods since the energy content of wood is relative to its density. Hardwoods will result in a longer burning fire and less frequent refueling. A moisture content of 15% to 20% (seasoned) is recommended. Wood that has been cut and split and let to dry under a cover for a period of one year will usually meet that criteria. The required drying time will vary depending on the climate. Wood that is packed tight together will take longer to dry. Seasoned wood is darker in color than wet wood and will have visible cracks in the grain on the ends. Excessively wet wood will be difficult to burn and will result in lower efficiency, increased creosoting and deposits on the glass and in the chimney. Excessively dry wood will burn well but will also have higher emissions and shorter burning time.

Do not burn scrap or garbage, treated wood or wood such as driftwood from the ocean which has been exposed to salt or other chemicals. Salt or chemicals can corrode the firebox and chimney. Do not burn large amounts of paper, cardboard, Christmas tree branches or building construction materials. Intense firing with these materials may overheat the fireplace, causing damage to the unit, a fire or even possibly igniting a chimney fire if the chimney is creosoted. Burning unapproved fuel, resulting in excessive pollutants being emitted, may be prohibited and subject to a fine or other penalty by the authority having jurisdiction in your area.

Processed firelogs can be used. Use only firelogs that have been evaluated for the application of fireplace and refer to firelog warnings and caution markings on packaging prior to use.

First Fires

Before using the fireplace make sure to remove the plastic wrapping and EPA label on door. Remove any glue residue left by the label using mild soap.

The first five or six fires should be small fires of short duration (about 30 to 60 minutes).

This will help cure the refractory bricks. During the first few fires of this appliance there may be some odor and smoke due to the curing of the paint, dust accumulation and burning off of lubricants used in the manufacturing process. It may set off a smoke alarm located in the same room. For this reason the room should be well ventilated for the first few fires.

WARNING

Be careful adding wood fuel to the fire or handling fireplace tools such as shovels, tongs or pokers.

WARNING

The bottom refractory can be cracked by excessive abuse such as tossing heavy logs onto the grate or gouging with fireplace tools. Exercise caution when adding wood to your fireplace.

Building a Fire (starting and maintaining a fire)

To start a fire, place several crumpled up balls of newspaper in the firebox. Place small dry pieces of kindling on top of the paper, criss-crossing the kindling so that there are air spaces in between. Keep the fuel far back enough so that air can get underneath. Open the air controls fully and light the newspaper. Once the newspaper and the kindling is well ignited, close the door. Once the kindling fire is well established, cord wood can be added (see *Primary Air Combustion Control* section for proper operation of the air controls).

The unit will burn best with 2-3 pieces of cord wood spaced 1 to 2 inches apart and allowing air to get under the fuel. Criss-crossing or arranging the fuel so that air can get underneath, will help the fire to get started easily. The unit should be operated with the air control fully open long enough to get the cord wood well ignited.

COMBUSTION CONTROLS

Primary Air and Air Boost Controls

There is no flue damper in the BIS Ultima-1 fireplace. As is common with air tight stoves, the combustion air control sets the flow of air entering the firebox. This allows for a more precise control of the fire. The combustion air control is located below the door on the left side. The main source of air (primary air) entering the firebox can be diminished by moving the air combustion control from left to right. The primary air is fully opened when the air control is completely moved to the left. The air control device can also be used to add an extra boost of air especially during fire start up and reloading of the unit. Pulling the air combustion control will induce an air boost at the base of the fire allowing an easier fire start up. When the fire is well established, the control can be pushed in to shut down the air boost allowing for a longer burn time. The combustion air control should be in the closed position (primary air and air boost) when the fireplace is not in use. This will minimize air leakage up the chimney. The combustion air control should be opened before opening the door to minimize the possibility of back draft coming into the room.

Accelerated Combustion

The maximum heat output for the BIS Ultima-1 fireplace is achieved by burning with the door closed and the combustion air opened and pulled out. By this method, the BIS Ultima-1 fireplace can produce up to 55,000 BTU of heat per hour. However, it will be necessary to reload with wood every one or two hours. This is the least efficient method of burning the BIS Ultima-1 fireplace.

Use caution when firing with the combustion air control wide open. Only burn cord wood in this manner. Small dry pieces of softwood and construction scraps will burn very intensely using this method and may damage the firebox.

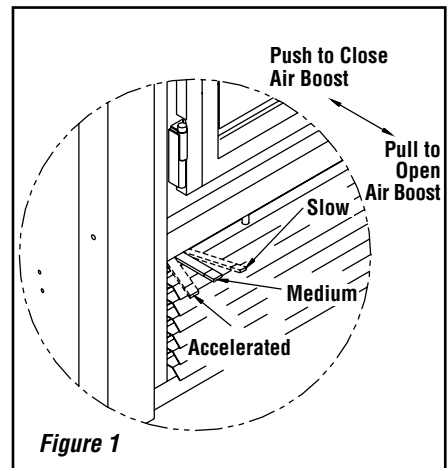


Figure 1

Medium Combustion

This is the recommended mode of operating the BIS® Ultima-1 fireplace and should be the one normally used since it will deposit the least amount of creosote on the glass and in the chimney. The combustion air control must be 3/4 closed and pushed in to close the air boost (*Figure 1*). The precise setting will depend on many factors, including chimney length and the moisture content of the wood.

For instance, a long chimney will necessitate closing the damper more. To obtain the proper combustion, close the damper completely, then open it about 1/4" to 1/2". Three medium size pieces of wood should be burning on a bed of hot coals. The heat output will be approximately 30,000 BTU per hour and the loading time will be about every 3-4 hours. Softwoods may be burned using this method but the time will be substantially reduced.

Slow Combustion

When the air combustion control is completely closed, the fireplace is in a slow combustion phase. If the hearth is hot enough, slow combustion will not extinguish the fire, but there will be a noticeable change in the flame pattern. The flames will be slow and may appear dirty if the wood is too wet (moisture content of 20% and more). Do not allow the wood to burn without flame, since this will produce excessive creosote in the unit.

Creosote may accumulate on the glass door. This method of burning should be used only after operating the BIS Ultima-1 fireplace with the air control opened (*Figure 1*) to produce a hot fire for about an hour or at medium pace for at least three (3) hours. Slow combustion can be used at night in order to reduce the heat output and to prolong the burn. The loading time will be between 6-8 hours.

REFUELING FOR BEST PERFORMANCE

The BIS Ultima-1 fireplace will operate best if attention is given to operating the unit with the damper fully opened (*Figure 1*) after refueling in order to bring the firebox and the chimney system up to their optimum operating temperature. Combustion efficiency is relative to firebox temperature. A temperature of 500° C (932° F) and up, with a visible flame, in the upper part of the firebox indicates a maximum efficiency. To obtain this temperature, the fireplace must be operated with the primary air and air boost controls fully opened during 10 to 20 minutes after reloading, depending on the heat and on the moisture content of the wood.

Once you have reached the desired temperature, the air boost can be closed and the primary air set to a medium setting. You know you have reached the desired temperature when, closing the primary air control, you can see a flame at the top of the firebox. The benefit of this technique will be cleaner glass, less creosoting, greater efficiency and the most pleasing fire for your enjoyment. If your fireplace is equipped with a forced air system, make sure the central blower is turned off during reloading to avoid smoking problems.

SMOKING – CAUSES AND TROUBLESHOOTING

To reduce the likelihood of smoking when opening the door, set the combustion air controls to the left before opening the door. Your fireplace has been designed and tested to provide smoke free operation. Occasionally, there may be a small amount of smoking upon lighting the fire, until the chimney heats up but this should not continue. If the fireplace continues to smoke it is probably for one of the following reasons:

A. Negative pressure in the house

As the fire burns, air goes up the chimney. This air must be replaced through leakage into the house or through the outside air duct. When operating the BIS Ultima-1 fireplace, open a nearby window temporarily to check if there is adequate replacement air supply.

B. Blowers operating (e.g.: range hood) -

These blowers draw air out of the house and may actually cause a negative pressure in the house. Turn off all blowers and open a nearby window to determine if this is the cause of the problem.

C. Wet wood- Wet or tarred wood will smoulder and smoke instead of burning properly. Your dealer can help you determine if you have properly seasoned wood for burning.

D. Dirty or blocked chimney- Check to make sure the chimney is clear and clean. If dirty call a certified chimney sweep or use a properly sized chimney brush to clean.

E. Chimney not long enough- The minimum chimney height is twelve (12) feet (3.7 m) not including the fireplace height. The chimney must extend at least three (3) feet (915 mm) above its point of contact with the roof and at least two (2) feet (610 mm) higher than any roof or wall within ten (10) feet (3 m) of it. When installed with offsets, the minimum chimney height is fifteen (15) feet. Additional height will increase draft and will decrease the tendency to smoke.

F. Poor chimney draft- With no fire, there should be sufficient draft to exhaust cigarette smoke introduced under the baffle. Chimneys installed against an outside wall without protection may generate back draft problems which will cause start-up problems. To prevent this, open a nearby window, roll up a piece of paper and light it. Then, hold it in the upper part of the firebox to warm up the chimney. Wait until the draft is sufficient, then start the fire.

G. Blower for forced air kit operating - Make sure that the blower is in the "off" position when you open the fireplace door for reloading.

IMPORTANT CAUTIONS

A. Do not block the hot air vents to the fireplace as this will cause the fireplace to overheat.

B. Never use gasoline, gasoline-type lantern fuel, kerosene, charcoal lighter fluid, or similar liquids to start or 'freshen up' a fire in this fireplace. Keep all such liquids well away from the fireplace while it is in use.

C. Do not burn coal. The sulphur in coal will corrode the firebox and chimney.

D. Do not burn driftwood which has been in the ocean or salt water. The salt will corrode the firebox and chimney.

E. Do not burn wood in the area in front of the grate.

F. Do not abuse the unit by burning paper, or cardboard or construction material such as pressed wood, plywood or lumber. Wood protectors, metallic paper, coal, plastic, waste, sulphur and/or oil will damage the fireplace.

G. Do not allow the wood to smoulder or burn without flame, since this will produce excessive creosote in the unit as well as increased particulate emissions.

MAINTAINING YOUR FIREPLACE

Creosote - Formation and Need for Removal

When wood is burned slowly, it produces tar and other organic vapors, which combine with expelled moisture to form creosote. The creosote vapors condense in the relatively cool chimney flue of a slow-burning fire. As a result, creosote residue accumulates on the flue lining. When ignited this creosote makes an extremely hot fire.

The chimney shall be inspected at least twice a year during the heating season to determine when a creosote buildup has occurred.

When creosote has accumulated it shall be removed to reduce the risk of a chimney fire.

When the creosote accumulation is large, a creosote fire in the chimney can damage the chimney and overheat the surrounding wood framing. Creosote formation in a chimney can be minimized by making sure there is always visible flame burning, avoid smouldering fires and by proper refuelling techniques.

Chimney Maintenance



Regular chimney inspection and maintenance combined with proper operation will prevent chimney fires. Keep your chimney clean. Do not allow more than 1/16" (1.6 mm) creosote build up in your chimney. The amount of creosote will depend on variables such as frequency of use and type of fire. We recommend that you:

- A. Initially inspect the chimney system weekly. From this, you will learn how often it will be necessary to clean your chimney.
- B. Have your chimney cleaned by a qualified chimney sweep. If you wish to clean it yourself, we recommend using a stiff plastic or non-metallic brush. If a metal brush is used, its size should be slightly smaller than the flue to avoid damaging the chimney. Do not use a brush that will scratch the stainless steel interior of the chimney.
- C. Do not expect chemical cleaners to keep your chimney clean. The rain cap can be removed for inspection and/or cleaning of the chimney.

Top Baffle Removal Prior to Cleaning The Chimney

Before starting to clean your chimney, we recommend that you remove the top baffle to avoid creosote dust collection at the top of the baffle. Follow these steps to set the top baffle out of the way:

1. Remove the side refractory holder. They are located at the top of the refractory.
2. Lift the front baffle.
3. Slide the back baffle under the front baffle. You now have access to the chimney.

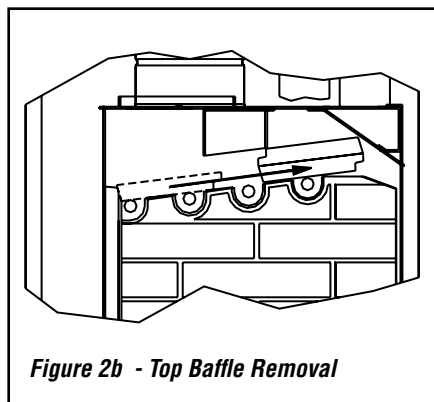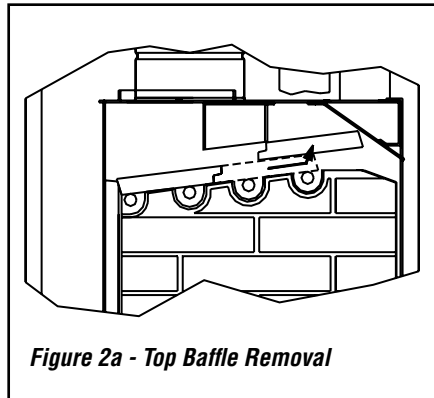

Dealing With a Chimney Fire

Regular chimney maintenance and inspection can prevent chimney fires. If you have a chimney fire, follow these steps:

1. Close the fireplace door and the combustion air controls.
2. Alert your family of the possible danger.
3. If you require assistance, alert your fire department.
4. If possible, use a dry chemical fire extinguisher, baking soda or sand to control the fire. Do not use water as it may cause a dangerous steam explosion.
5. Check outside to ensure that sparks and hot embers coming out of the chimney are not igniting the roof.
6. Do not use the fireplace again until your chimney and fireplace have been inspected by a qualified chimney sweep or a Fire Department Inspector.

Finish Door Casing Care

Use a glass cleaner and a soft cloth to polish the casing. Do not use abrasives such as steel wool, steel pads or an abrasive polish for they may scratch the casing's finish.

DISPOSING OF ASHES

Remove ashes only when the fire is out and the ashes are cold (24 to 48 hours after the fire is out). Do not leave the ashes in the house as they give off carbon monoxide and other toxic gases.

WARNING

Disposal of Ashes: Ashes should be placed in a steel container with a tight fitting lid and moved outdoors immediately. The closed container of ashes should be placed on a non-combustible floor or on the ground well away from all combustible materials, pending final disposal. If the ashes are disposed of by burial in soil or otherwise locally dispersed, they should be retained in the closed container until all cinders have thoroughly cooled.

REFRACTORY REPLACEMENT

The intense heat of the fire will normally cause hairline cracks in the refractory. These cracks can be minimized by proper curing as described in "First Fires". They will not normally diminish the effectiveness of the refractory. If large cracks develop, then the refractory should be replaced. To replace the refractory bricks, follow these steps:

1. Remove the front refractories
2. Remove the bottom refractory
3. Remove the left side refractory
4. Remove the right side refractory
5. Remove the back refractory
6. Remove the front ceramic baffle
7. Remove the rear ceramic baffle

To install the new refractories, follow the above steps in reverse.

DOOR INSTALLATION

The door must be installed only when the installation of the BIS® Ultima-1 fireplace is completed. All you have to do is fit the male part of the hinge, already on the door, to the female part, which is on the fireplace.

To remove the door, simply pull the door up from the hinges.

The door adjustment has been set at the factory. If the fit is still not perfect, you can adjust the door using the hinge screws.

DOOR ADJUSTMENT

The door may need to be adjusted to be completely airtight. The gaskets' air-tightness can be adjusted using the adjustment screw located on the right side of the fireplace facade (An Allen key #1/8 – not supplied - will be necessary for this adjustment).

Checking Door Seal - A one-inch strip of paper may be used to perform a test of the integrity of the door seal. Close the door on the paper in at least eight points. It is normal to feel only a slight amount of friction. The door gasket does not need to be "tight" in all areas, since a small amount of leakage is not hazardous or detrimental to the performance of your fireplace.


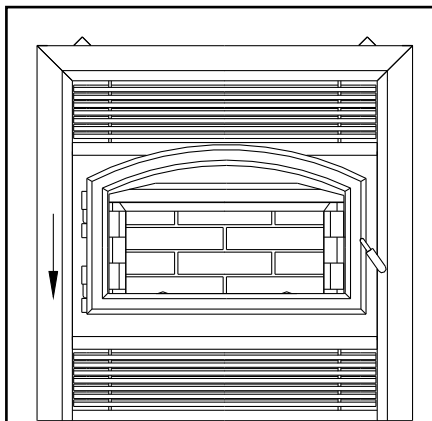


Figure 3 - Door Installation

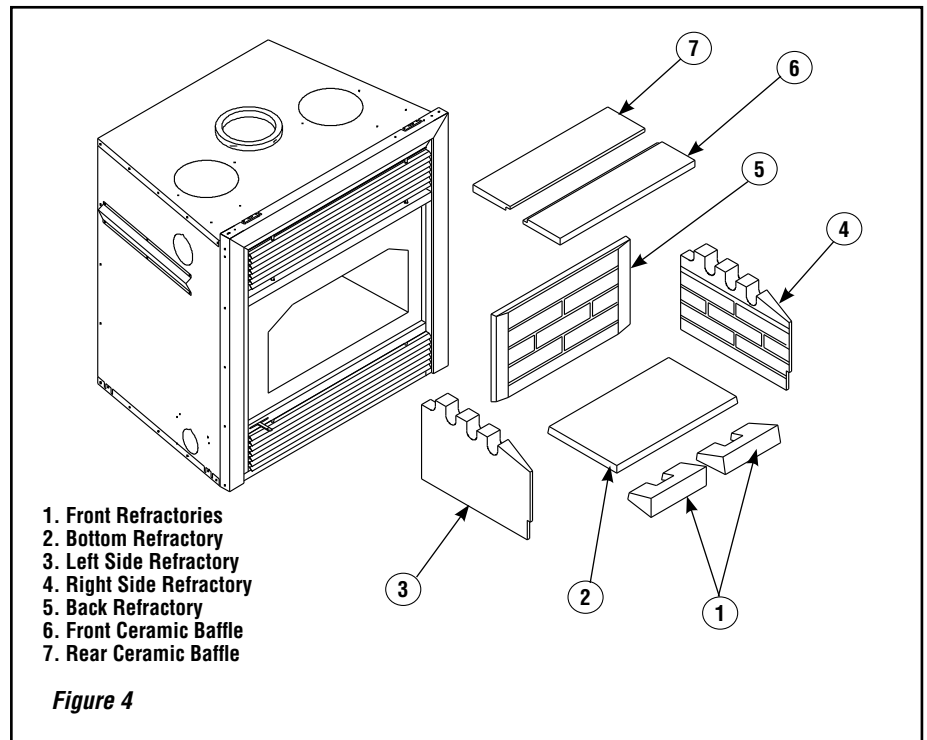

1. Front Refractories
2. Bottom Refractory
3. Left Side Refractory
4. Right Side Refractory
5. Back Refractory
6. Front Ceramic Baffle
7. Rear Ceramic Baffle

Figure 4

WARNING

- Use only a IHP glass doors, specifically designed for the BIS Ultima-1 fireplace.
- The fireplace cannot be operated without door or firescreen. Consult your dealer to select the correct replacement door or firescreen.
- Important! To assure proper alignment of glass doors: Install this fireplace in a square and plumb condition, using shims as necessary at sides and/or bottom.

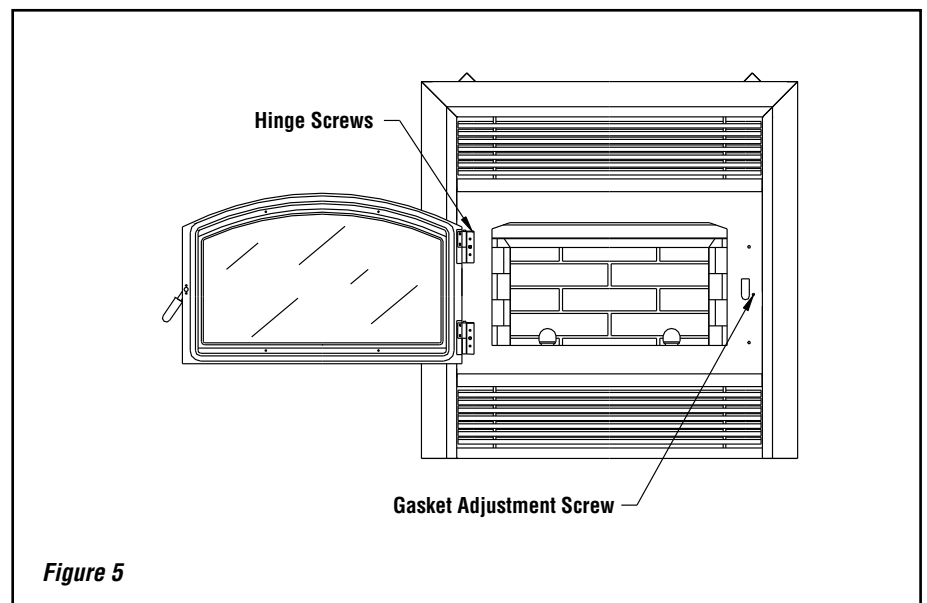


Figure 5

GLASS CARE

Glass Replacement

The glass used for the BIS® Ultima-1 fireplace is a high temperature ceramic glass (1,400° F / 760° C). If the glass breaks, it must be replaced with an identical ceramic glass. Tempered glass or ordinary glass will not withstand the high temperatures of the BIS Ultima-1 fireplace. Replacement glass should be purchased from a IHP dealer (see "Replacement Parts", **Page 25**). **DO NOT OPERATE THE UNIT WITH CRACKED OR BROKEN GLASS.**

Glass Cleaning

The BIS Ultima-1 fireplace is designed to keep the glass clean under normal operating conditions. If the BIS Ultima-1 fireplace is operated continuously with the combustion air controls closed, the glass will tend to get dirty unless the fuel, firebox and glass are maintained at hot temperatures (see "Refueling For Best Performance"). To clean the glass, there are a number of specially designed cleaners. Your IHP dealer can recommend a suitable cleaner which is available in your area. Regular household glass cleaners will not clean creosote. **Do not use abrasives such as steel pads, steel wool or oven cleaner as they will scratch the glass.**

DO NOT USE CHEMICAL GLASS CLEANERS ON PAINTED SURFACES AS IT MAY CAUSE THE PAINT TO PEEL.

CAUTION: DO NOT ALLOW WINDOW CLEANER TO GET IN CONTACT WITH DOOR OR PAINT ON FACADE OR DOOR. ONCE CLOSED, CONTACT OF GLASS CLEANER WITH THE FIREPLACE FACADE CAN PROVOKE PAINT PEELING OFF.

Gasket Replacement

Remove the door from the unit (see **Page 7**) and lay it on a clean unabrasive surface. To replace the gasket, first remove all of the old gasket and gasket cement. Make sure that the surface is totally clean before applying new cement (a high temperature silicone caulking rated at 500° F [260° C] is suitable) or adhesion problems may result. Apply gasket cement to the gasket channel and install the new gasket. This replacement part is available from your IHP dealer in the following dimensions:

| Gasket | Length* | Dimensions | Part No. |
|---------------|--------------|--------------------|----------|
| Around Glass | 69 (1753) | 5/16" dia. (8) | SR1823H |
| On Door Frame | 73 (1854) | 5/8 dia. (15.9) | SR1823G |

Table 1 * Inches (millimeters)

FIREPLACE INSTALLATION

Locating The BIS Ultima-1 Fireplace

The best location to install your fireplace is determined by considering the location of windows, doors, and the traffic flow in the room where the fireplace is located, allowing space in front of the unit for the hearth extension and the mantel, and taking into consideration the location of the hot air ducts (optional), outside air kit and chimney.

If possible, you should choose a location where the chimney will pass through the house without cutting floor or roof joists (see fireplace dimensions **Page 10**).

Usually, no additional floor support is needed for the fireplace. The adequacy of the floor can be checked by first estimating the weight of the fireplace system. Weights are given in the appendix. Note the floor construction and consult your local building code to determine if additional support is needed.

The BIS Ultima-1 fireplace may be installed directly on the floor or on a raised base (for proper guidelines, refer to "Hearth Extension Requirements") and a minimum of 6'8" (2 m) measured from the base of the appliance to the ceiling is required.

When selecting the location, the chimney outlet position and the direction of the wind are important factors affecting the chimney performance. To allow a maximum draft and to reduce wind turbulence, the chimney must:

- Penetrate the highest part of the roof.
- Be installed as far as possible of roof offsets, trees or any other obstructions that may cause wind turbulence and back drafts in the chimney.
- The least amount of offsets (elbows) possible. **NOTE: A maximum of 2 offsets is allowed.**

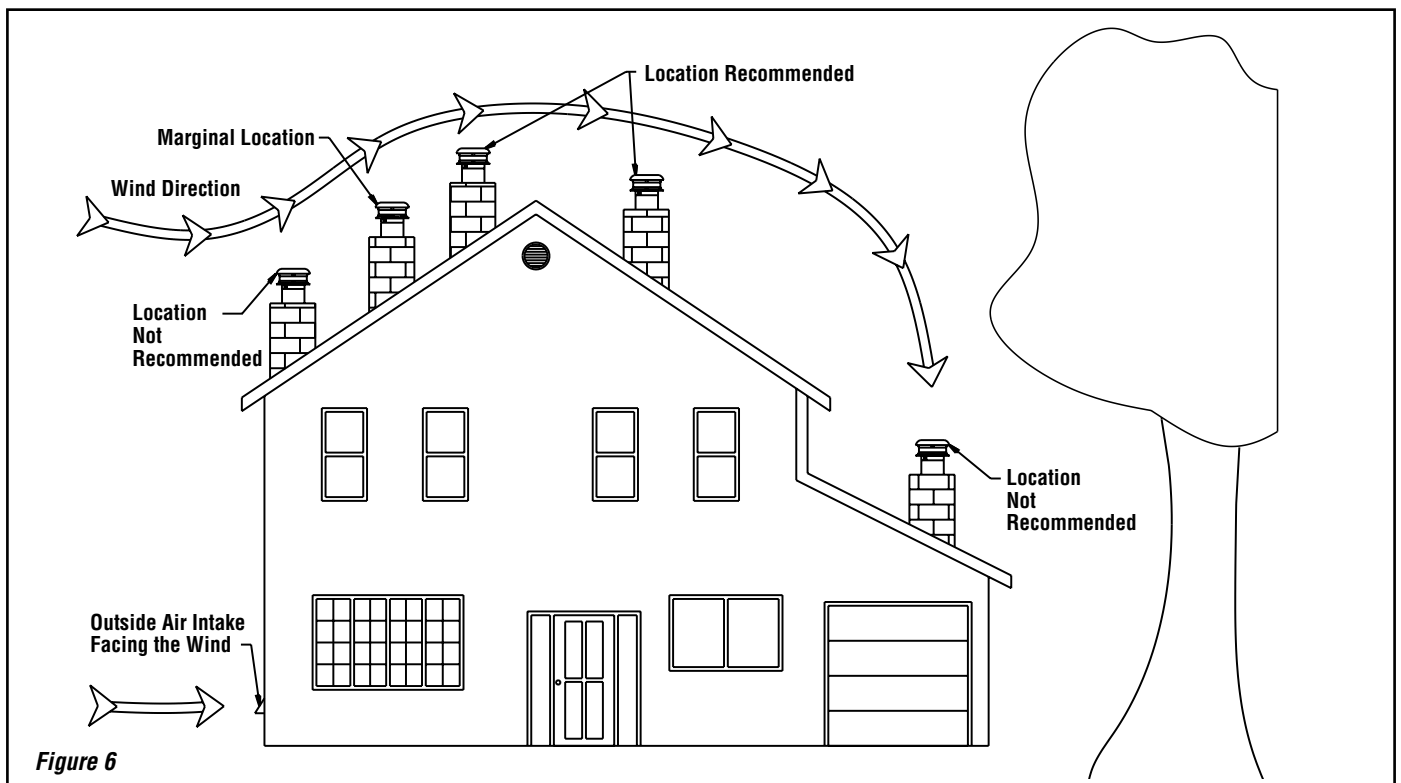


Figure 6

Framing, Facing And Mantel

The construction of the framing, facing, and mantel must be in accordance with the standards and the following illustrations (**Figures 7, 8 and 9**):

- A. Frame the fireplace using 2" x 3" or heavier lumber.
- B. **WARNING: Combustible materials cannot be used in the space directly above the fireplace, except for the studs above the facade that support the facing and mantel. This area must remain empty for a height of 6'8" (2,032 mm) measured from the base of the appliance.**
- C. Frame the fireplace with vertical studs at the sides of the fireplace running from floor to ceiling (see **Figure 9**). If combustible facing is to be used, position the studs back, from the front edge of the fireplace (a space that is the thickness of the facing material, so that the facing can be installed flush with the fireplace facing). Frame headers between the vertical studs only as follows:
 - Place 2" x 3" or 2" x 4" headers, only along the upper part of the front, side and back faces (some codes may require a 2" x 6" on an outside bearing wall). Do not put wood or any combustible material within the area above the fireplace except on the front facing.
 - Place headers only as required to support the facing and mantel.
- D. **WARNING: The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with Drywall panels around the fireplace.**

Hearth Extension Requirements

The BIS® Ultima-1 fireplace may be installed directly on a combustible floor. The supplied safety metal strip must be positioned as follows: One half under the front of the fireplace and the other half must extend on the floor over which the hearth extension will be built (see **Figure 7**).

* The safety metal strip must cover the entire width of the fireplace

The combustible floor in front of the fireplace must be covered with a non-combustible material (tile, marble, stone, etc). See **Figures 7 and 8**.

COLD CLIMATE INSTALLATIONS

Climates where temperatures will fall below 32° F (0° C).

The heating performance of the appliance will vary depending upon the level of insulation, house design, how the appliance is operated, etc.

If this fireplace is being installed in a cold climate, it is especially important to seal all cracks around the fireplace and wherever cold air could enter the room with noncombustible material.

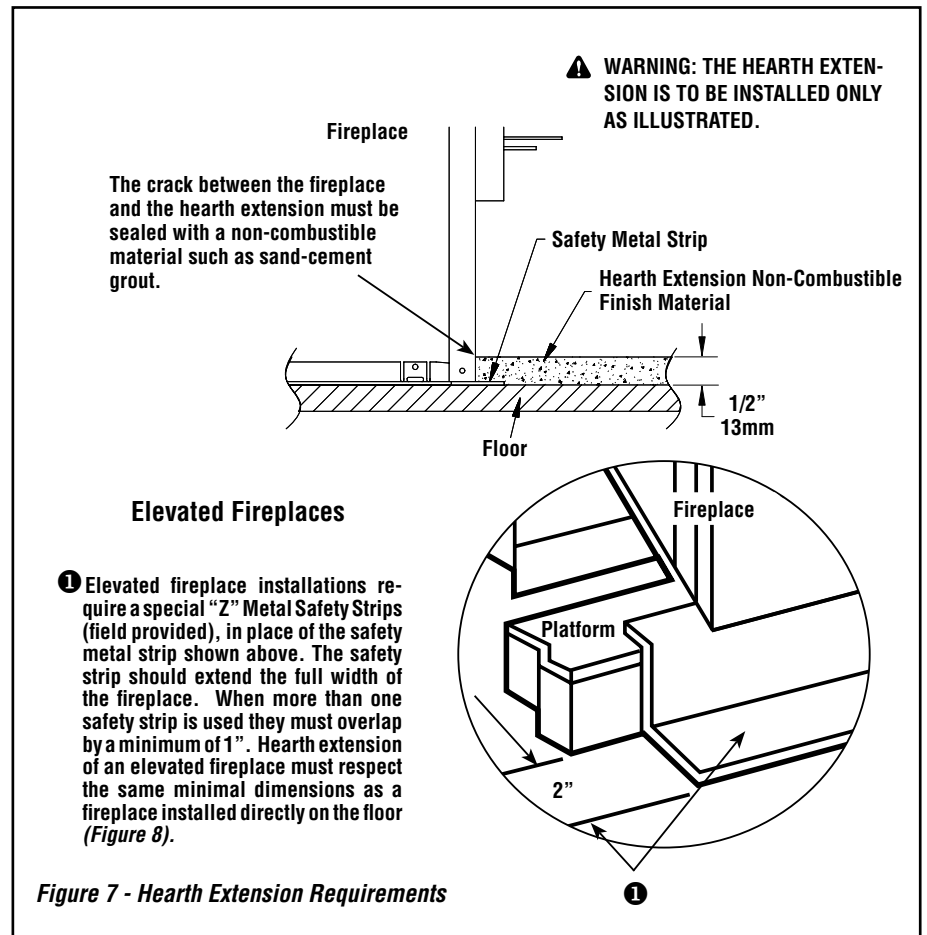


Figure 7 - Hearth Extension Requirements




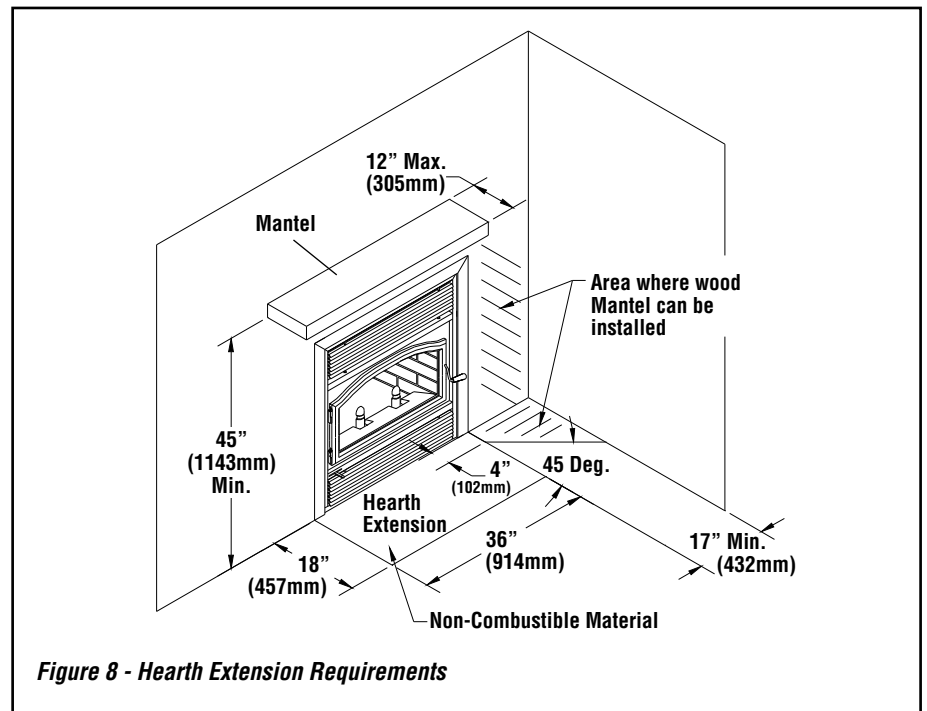


Figure 8 - Hearth Extension Requirements



Also, the outside air inlet duct should be wrapped with noncombustible insulation to minimize the formation of condensation. Do not place insulation materials directly against the chimney sections. We recommend that you use the insulated wall radiation shield since it will maintain the home's thermal barrier. AC chimney is NOT recommended in very cold climates (in areas with temperatures below 32°F (0°C)).

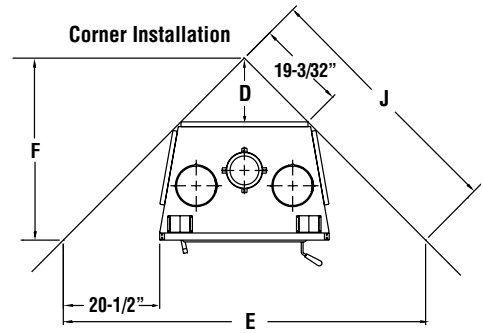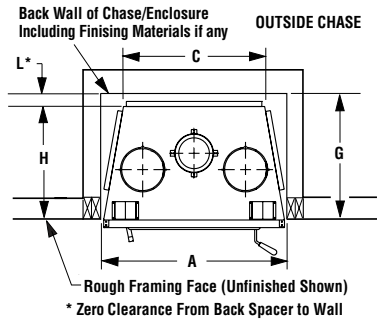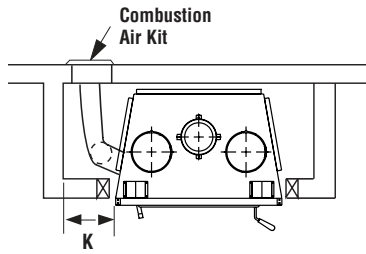


| FRAMING DIMENSIONS | | |
|--------------------|----------|---------|
| A | 36-3/8" | 924 mm |
| B | 37" | 940 mm |
| C | 28-3/32" | 714 mm |
| D | 13-1/2" | 343 mm |
| E | 77" | 1956 mm |
| F | 38-1/2" | 978 mm |
| G | *24-1/2" | 603 mm |
| H | 23-1/2" | 597 mm |
| J | 54-7/16" | 1383 mm |
| K | 8" | 203 mm |
| L | 1" | 25 mm |

Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)


* Total depth is 25 inches including the back spacer minus 1/2 inch for drywall to be flush with the facing.

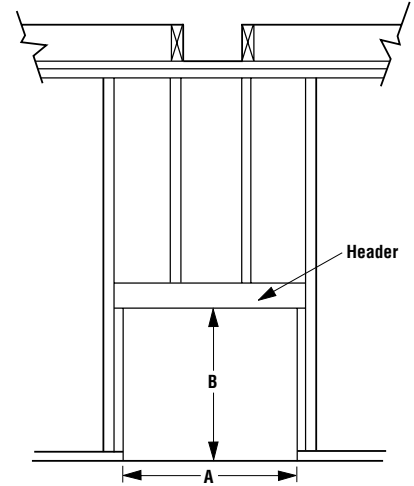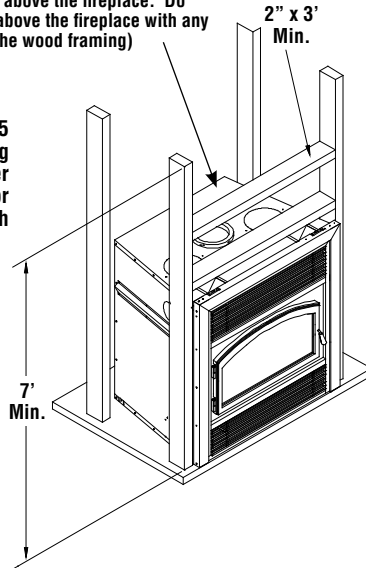

Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)

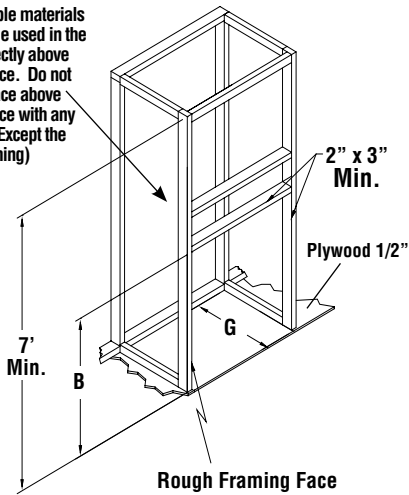

Rough Framing Face (dimension includes finish material inside framing, if any)

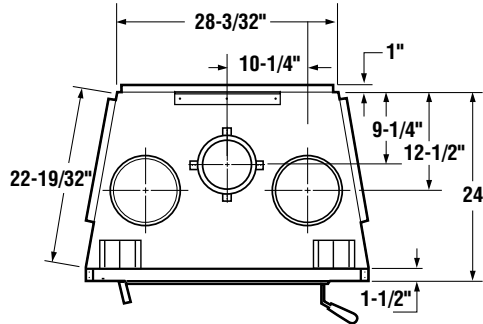

Notes

Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.

* The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with Drywall panels around the fireplace.




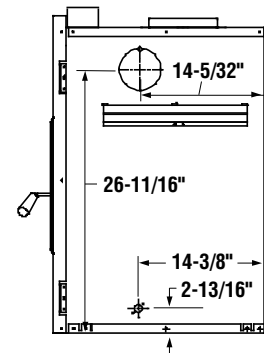



Figure 9 - Fireplace and Framing Dimensions

Insulated Chase Construction

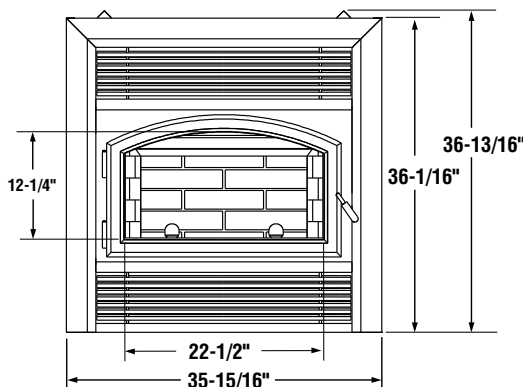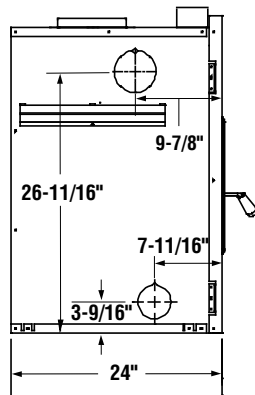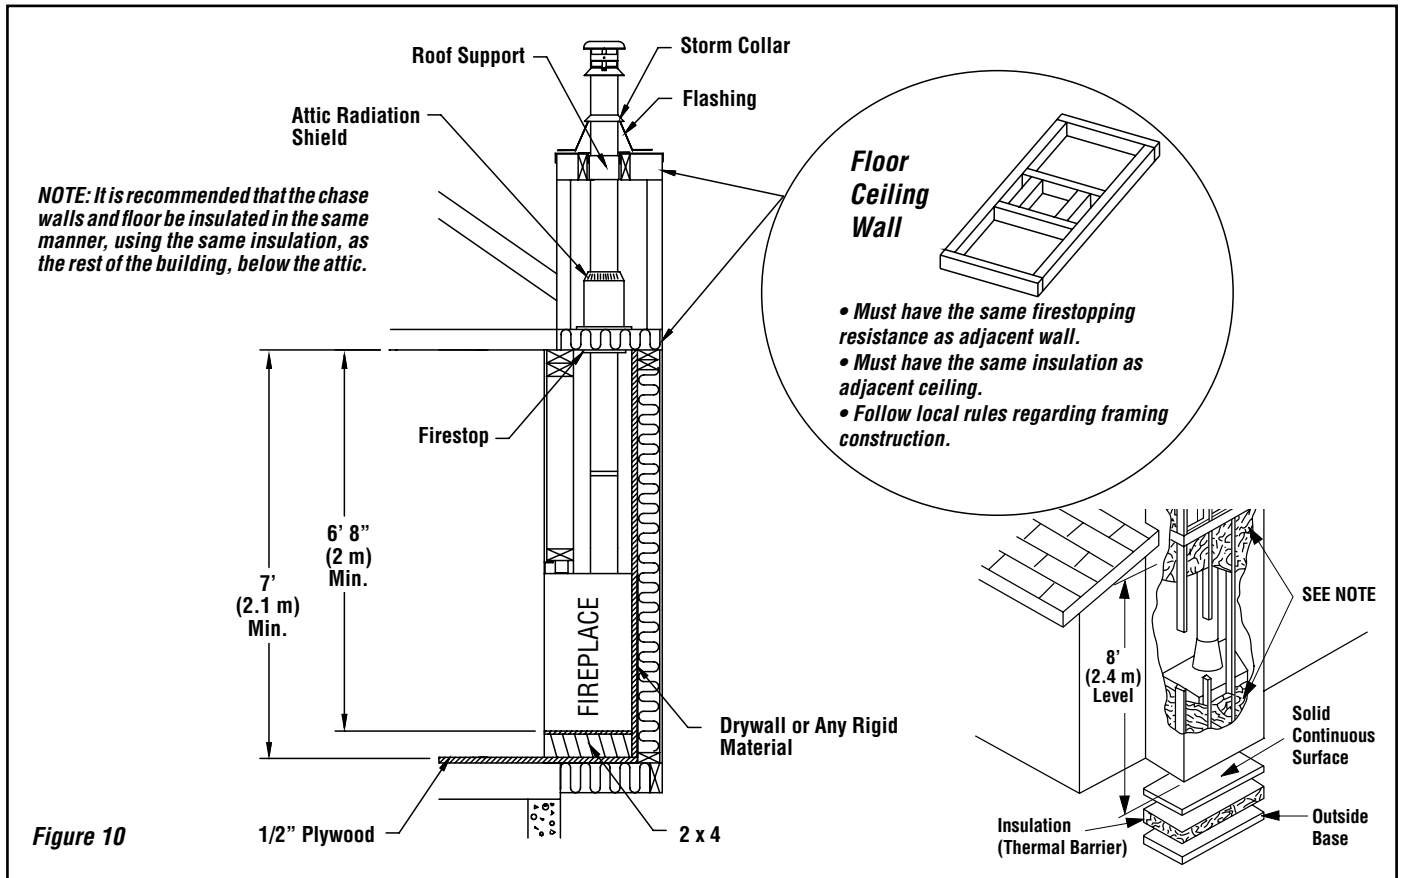

Nailing Flanges

Four nailing flanges are provided to secure the fireplace to the floor (see **Figure 11**). Bend the nailing flanges down so that each flange is flush with the floor, then using nails or screws, secure the fireplace to the floor (2 places each side). The heads of the screws or nails must be large enough to completely cover the holes in the nailing flanges.

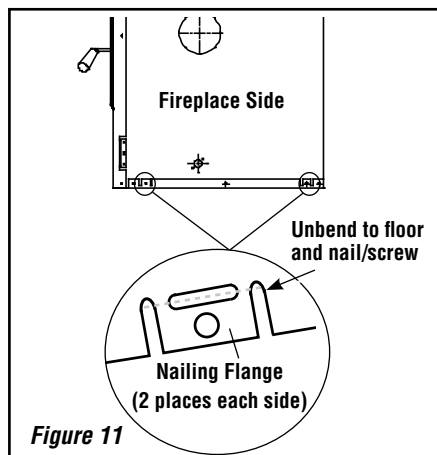



Facing

1. Combustible material must be installed flush with the fireplace. It may not project in front of and on the fireplace (i.e. the steel facade of the fireplace) (**Figure 12**).

2. Non-combustible materials such as brick, stone or ceramic tile may project in front of and onto the fireplace facing (**Figure 13**).

Mantel

The mantel must be installed at least 45" (1143 mm) above the base of the fireplace (**Figure 12**).

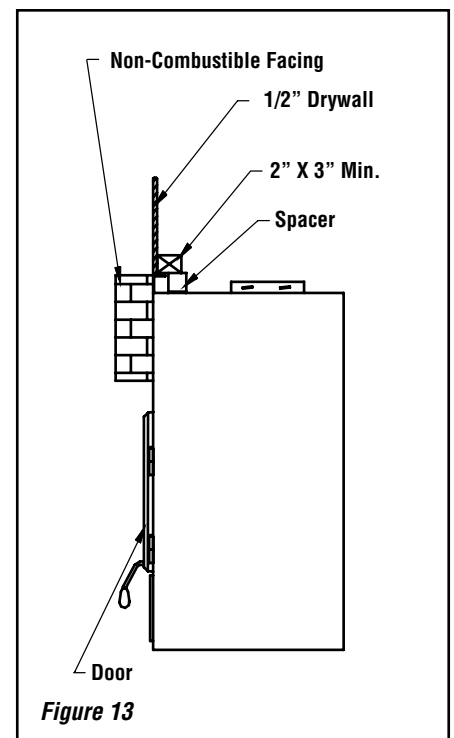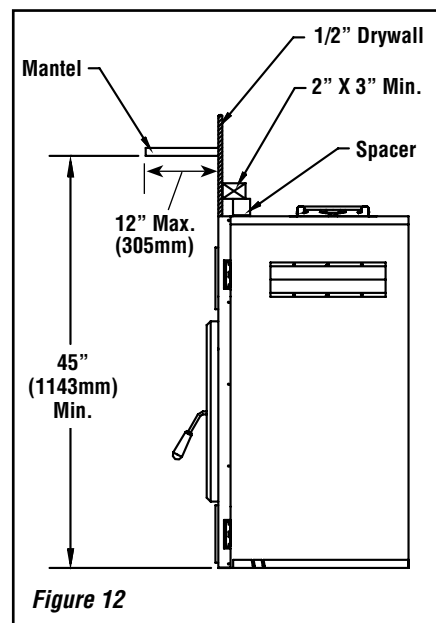

HOT AIR DUCTING INSTALLATION

The BIS® Ultima-1 fireplace is approved for use with a Gravity Kit.

Gravity Kit

The gravity kit is designed for double hot air outlets and includes: (See **Figures 14 and 15**)


- 2 telescopic lengths 8" I.D.
- 2 90° elbows 8" I.D.
- 2 hot air outlet kits (grill and frames)
- 2 adaptors

See *Gravity Kit Accessories* on **Page 22**.

The only blower that can be used with the gravity kit is the UZY5.

The gravity kit allows you to block the upper louver of the fireplace. To do so, follow the steps below:

- a) Remove the upper louver from the fireplace.
- b) Install the black panel (BWCF) making sure that the insulation strip is installed inside.
- c) The fireplace facade can be covered with non-combustible material (**Figure 16**).

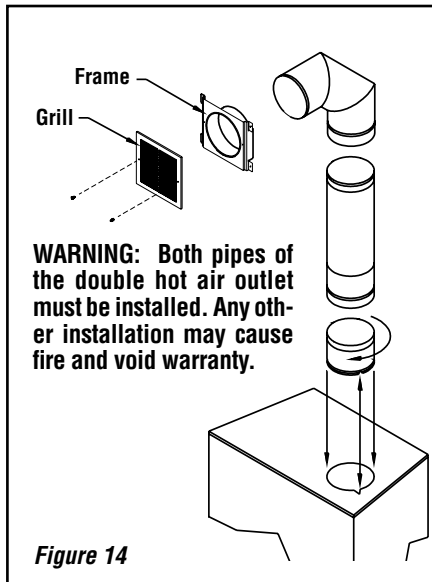



For safe installation, the gravity kit must meet the following requirements:

Minimum height* 68" (1,727 mm)
Maximum length See **Figures 14 and 15**

* The height of the louver must be measured from the base of the BIS Ultima-1 fireplace to the middle point of the louver.

To extend the double outlet system forward of the BIS Ultima-1 fireplace (not flush), it will be necessary to purchase two adjustable lengths (H8951).

When installing the double outlet system, the hot air outlets can be installed in the same room as the fireplace, or one or both of the outlets can be installed in adjacent or upper rooms. Installing the ducts at different elevations will tend to exhaust more heat out of the higher outlet (**Figure 15**).

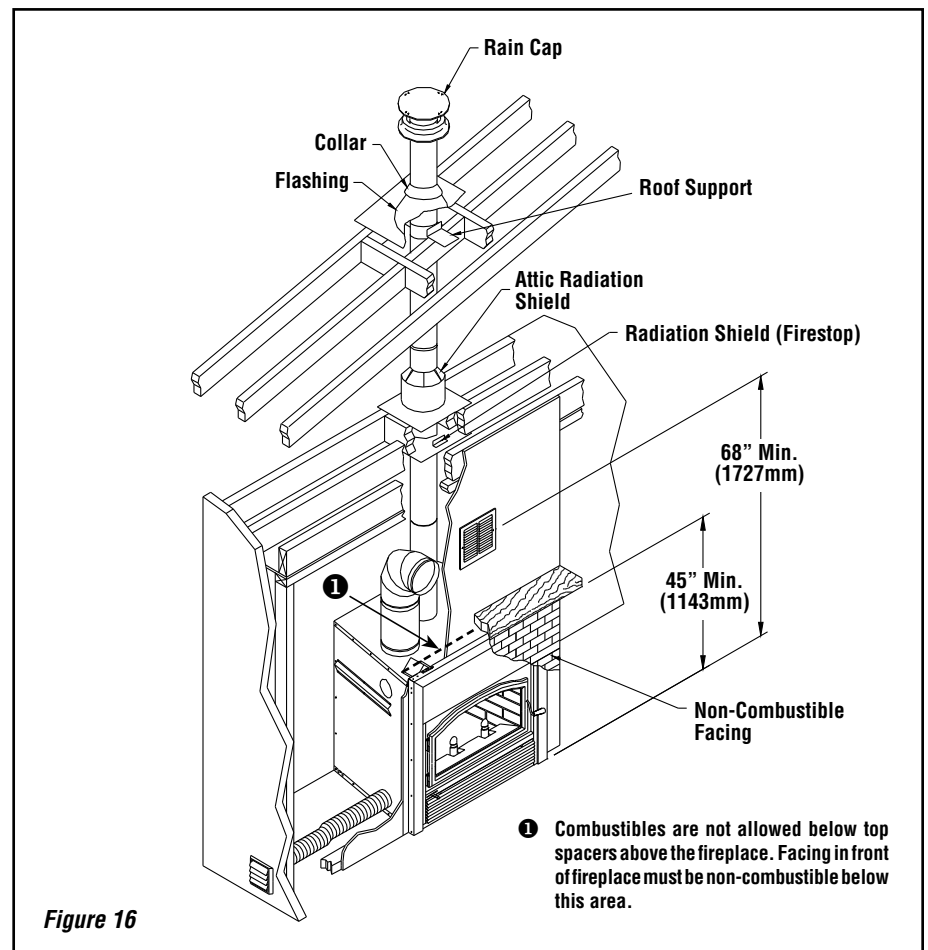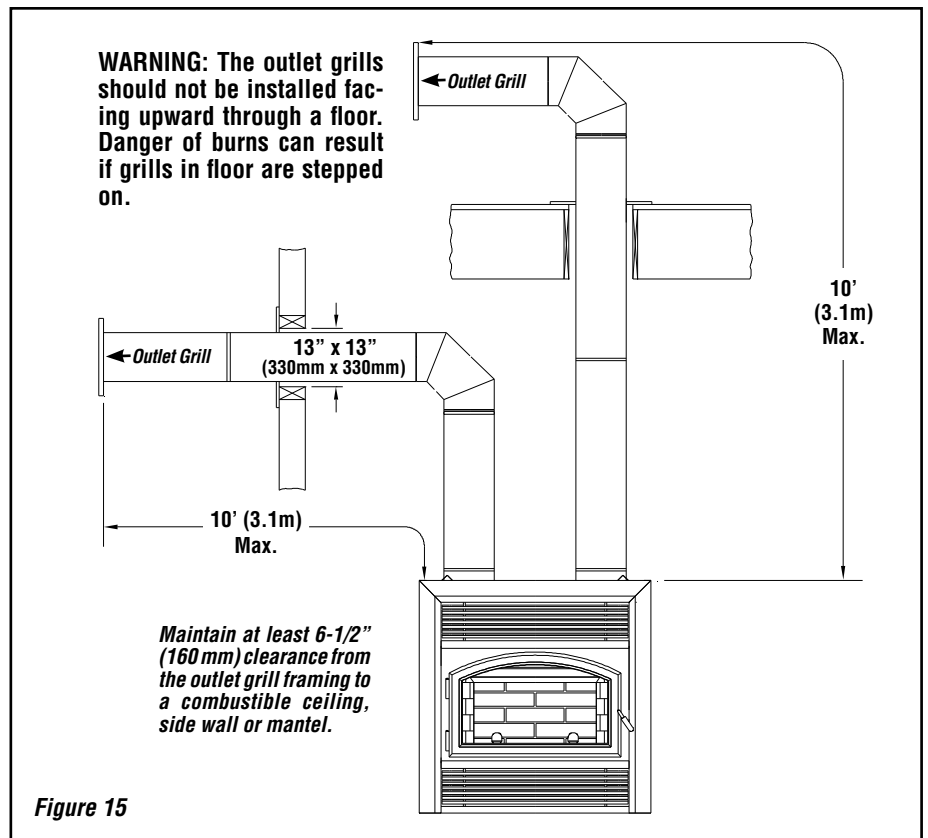

The duct system must be installed respecting the following:

1. Remove the plates closing up the 8" dia. holes on top of the fireplace. Then, cut the insulation in order to obtain two 8" dia. openings. Fix the adaptors on the fireplace openings by turning clockwise (**Figure 14**).
2. Maintain at least a 2" (50 mm) clearance between the ducts and any combustible material; the required hole size is 13" x 13" (330 mm x 330 mm).
Exception #1: For the grills, the framing can be 10-3/4" x 10-3/4" (275 mm x 275 mm) to provide the clearance as required by the integral spacers on the double outlet duct system.
3. The maximum number of elbows in a run of duct is two.
4. Maintain at least 6-1/2" (160 mm) clearance from the outlet grill framing to a combustible ceiling, side wall or mantel.
5. When traversing a combustible wall or floor, a firestop must be installed at the wall or floor penetration. The hole size must be 13" X 13" (330 mm x 330 mm).
6. Do not connect the hot air ducts to a central heating system. Malfunction of the heating system's blower will cause the fireplace to overheat. A furnace duct is only single wall and not double wall as is required for the BIS® Ultima-1 fireplace hot air exhaust.
7. Use only IHP grills and components as described in this manual. Other grills or registers, for example, may be too restrictive and may overheat the fireplace or ceiling.
8. Do not use insulated flexible ducts as they will overheat.
9. Do not use tees or any other components than the ones specifically listed here.
10. Never allow the ducting to pitch down as hot air will be trapped creating a fire hazard.
Never route the ducting downwards.
11. The hot air outlet grills must be installed with the louvers pointing downwards in order to prevent overheating adjacent ceilings.
12. Always install the two outlet grills when using the double hot air outlet kit and blocking the upper louver of the fireplace.

CENTRAL FORCED AIR KIT (NOT TESTED UNDER EPA CERTIFICATION)

The knock-outs provided on the back and on the sides of the BIS Ultima-1 fireplace allow the connection of insulated flexible pipe which enables you to heat adjacent rooms up to 50 feet from the fireplace.

The ducting system must be installed as described below:

- A) Fix the adaptor at the back and/or the side of the fireplace by twist-locking the adaptor to the fireplace. You can use more than one outlet on the fireplace (**Figure 17**).
- B) Attach the 5" flexible pipe, using the collars provided. Important: Make sure that the plastic wrapping around the flexible pipe will not be in contact with the fireplace.
- C) Route the flexible pipe to the chosen location. The ducting system can be installed either in an upper room or in a lower room.
- D) Attach the flexible pipe to the fan, using the collars (**Figure 18**).

- E) Fix the back draft damper to the fan outlet.
- F) Attach a flexible pipe to the fan / flexible pipe adapter (square to round) and stretch it up to the location where the heat is required.
- G) At that point, the flexible pipe can be attached to any air distribution grill. It is possible to connect a flexible pipe to a central heating system. Make sure the pipe will be connected to the warm air supply duct, not to the return air duct (**Figure 19**).
- H) Install the blower heating and cooling thermostat (HCTW) in that part of the house to be heated by the hot air duct. The thermostat can be switched to a cooling thermostat and installed in the same room as the unit. This thermostat will turn on the blower when the room where the fireplace is located becomes too hot.

This option requires electricity. Make sure that the connections to the fan have been made according to the local codes and comply with their requirements (see instruction provided with the thermostat).

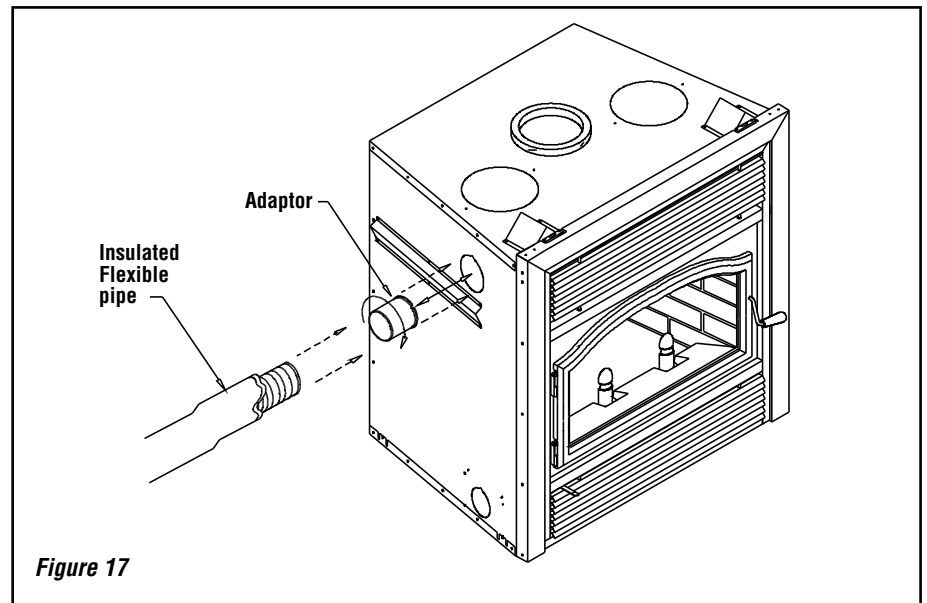


Figure 17

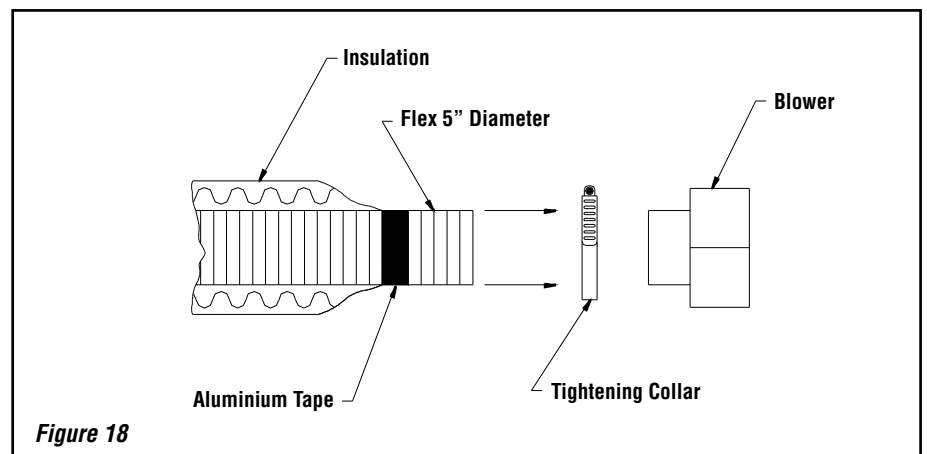


Figure 18

OUTSIDE AIR KIT - REQUIRED

During operation, the fireplace requires fresh air for combustion and draws air out of the house. It may starve other fuel burning appliances such as gas or oil furnaces. As well, exhaust blowers may compete for air, causing negative pressure in the house, resulting in smoke entering the house from the fireplace. This situation is aggravated in modern airtight houses. To overcome this problem, we strongly recommend that you install an outside air assembly. Check with local authorities having jurisdiction in your area, it may be mandatory.

NOTE: Should you decide not to install the outside air assembly, proceed as follows:

- Remove the bottom grill. The air box is located on front left and is on a slant.
- Unscrew the four screws holding the inside air box covering plate and remove it.

Outside Air Installation

The outside air assembly may be installed according to the following requirements:



- Duct length should be kept to a minimum. The maximum length of duct is twenty (20) feet (6.1 m) for a 4 in. dia. pipe (See note below).
- The air intake register must not be installed more than ten (10) feet (3050 mm) above the base of the fireplace.
- The fresh air must come from outside the house. The air intake must not draw air from the attic, from the basement or garage.
- The air intake should be installed where it is not likely to be blocked by snow or exposed to extreme wind and away from automobile exhaust fumes, gas meters and other vents.
- The duct and register may be installed above or below floor level.

The following components are required:

- Outside air kit (UZI) (includes 4 inch flex that goes up to ten (10) feet long)
- 4" Adaptor for fireplace connection (supplied with the unit)

Make a 4-1/4" (110 mm) hole in the outside wall of the house at the chosen location. From outside, place the outside air register in the hole (open side down) and fasten the register to the wall, with screws as shown (see **Figure 19**). Slip the pipe into the insulated sleeve. Place the insulated pipe over the register tube and over the fireplace's outside air connector (see **Figure 20**). At each end, carefully pull back the insulation and plastic cover exposing the flexible pipe. Using the aluminium tape provided, wrap the tape around the joint between the flexible pipe and the air inlets. Carefully push the insulation and plastic cover back over the pipe. Using aluminium tape, fasten the plastic cover in place.

NOTE: We recommend not to exceed 20 feet of 4" flexible pipe. If you require a longer length we recommend that you use a 5" diameter flexible pipe for the complete run up to 30 feet and a 6" diameter pipe for a run of up to 40 feet.

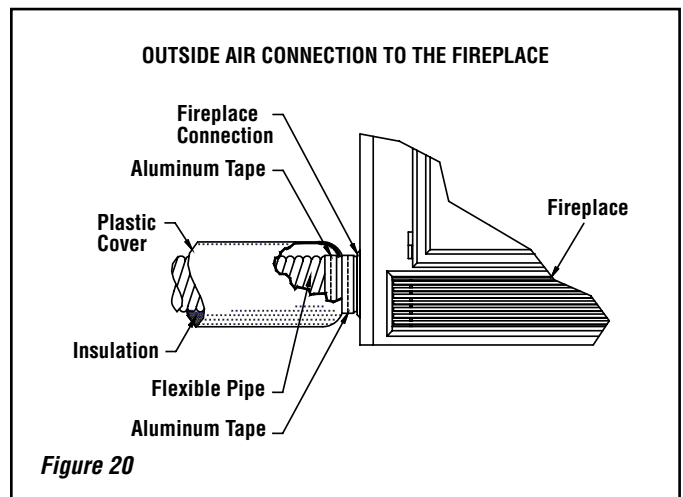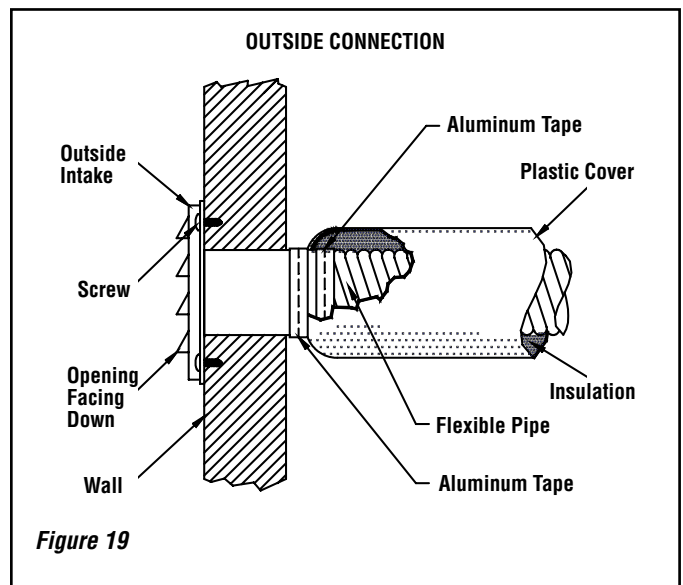

THE CHIMNEY SYSTEM

Chimney Installation Notes

1. Always install an interior chimney as it will provide better performance. In areas with continuous temperatures below - 18° C (0° F), the use of an exterior chimney increases the likelihood of operating problems such as low draft, high rate of creosoting, and poor start-up characteristics. Exterior chimneys are also prone to down drafting and flow reversal. Installations, which are located on lower floors in the house, such as in a basement, in combination with outside chimney, are especially prone to flow reversal. If interior installation is impossible, install an AC chimney enclosed in an insulated chase.
2. The fireplace model BIS® Ultima-1 may be installed only with Security Chimneys International Ltd 6" diameter chimney systems.
3. A chimney venting a fireplace shall not vent any other appliance.
4. The minimum chimney height is 12 feet (3.7 m). In altitude, add 18" (450 mm) to the chimney for every 2,000 feet (600 m) above sea level.
5. **All chimney installations must include at least one support.** The maximum length of chimney that can be supported by the fireplace is 26 feet (8 m).
6. The chimney must extend at least three (3) feet (915 mm) above its point of contact with the roof and at least two (2) feet (610 mm) higher than any wall, roof or building within ten (10) feet (3m) of it (**Figure 21**).
7. If the chimney extends higher than five (5) feet (1,500 mm) above its point of contact with the roof, it must be secured using a roof brace.
8. A rain cap must be installed on top of the chimney. Failure to install a rain cap may cause corrosion problems.
9. Cut and frame square holes in all floors, ceilings, and roof that the chimney will go through to provide a 2" (50 mm) clearance between the chimney and any combustible materials. Do not fill this 2" space with insulation or any other combustible material.
10. Portions of the chimney which may extend through accessible spaces must be enclosed to avoid contact with combustible materials or damage to the chimney.
11. When offsets are used, the pipe may not penetrate a ceiling or floor unless it is running vertical (no 30° offsets).

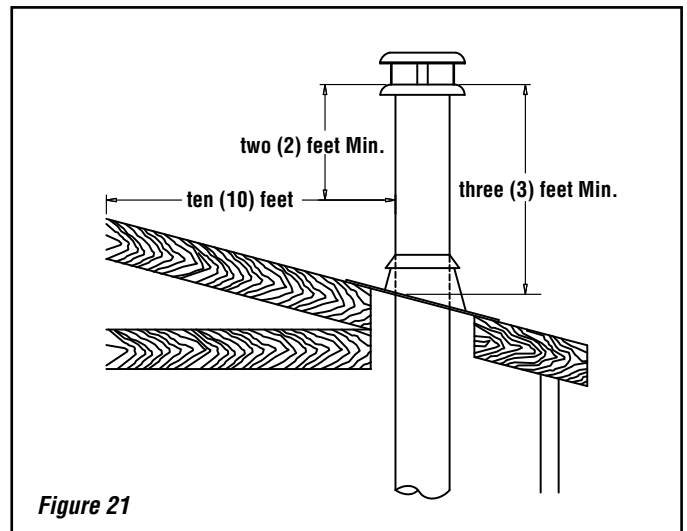


Figure 21

NOTE: 2" clearance to combustibles around chimney components required.

NOTE: Blown or fill type insulation materials must not be in contact with the fireplace or in the enclosure frame as described in "Enclosure" section.

NOTE: Local codes may not require firestopping at the ceiling levels for outside chase installations. However, it is recommended for safety and the reduction of heat loss.

CHIMNEY INSTALLATION INSTRUCTIONS

1. Cut and frame the holes in the ceiling, floor and roof where the chimney will pass (see **Figure 22**). Use a plumb-bob to line up the center of the holes. The sizes are indicated in **Table 2** for the floor and ceiling holes and **Table 3** (Page 17) for the roof holes.

| CHIMNEY MODEL* | SQUARE HOLE SIZE OPENING |
|------------------|--------------------------|
| ASHT / HT6103+ | 12-3/8" (314 mm) |
| S2100+ / HT6000+ | 14-1/8" (359 mm) |
| AC | 15 in (380 mm) |

NOTE: See Table 3 for Sloped Roof Framing
Table 2 - Flat Roof Framing

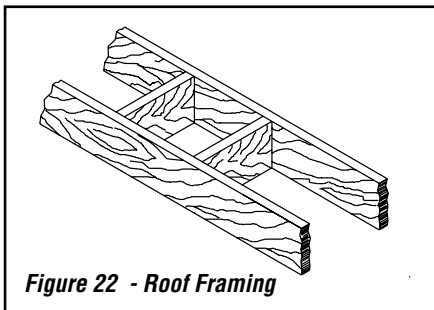


Figure 22 - Roof Framing

2. From below, install a firestop in each ceiling/floor separation through which the chimney will pass. At the attic level, install an attic radiation shield from above (**Figures 23a through 23d**).
3. For ASHT/HT6103+ AND S2100+/HT6000+ chimneys place the first chimney length on the fireplace. To lock it in place, turn 1/4 of a turn clockwise. With the AC chimney, you must use a starter section, **AC6SB*(H3779*)** or **AC6SB30*(H3780*)**, before installing the first chimney length (**Figure 24**). Continue installing chimney lengths making sure to lock each length in place.
4. Every time the chimney passes through a ceiling or a wall, install the appropriate firestop. When you reach the desired height, install the roof support. When installing a support, slightly lift the chimney system so the weight will lie on the support, not on the fireplace to reduce expansion noises (Refer to instructions included with the support).
5. Then, put the roof flashing in place and seal the joint between the roof and the flashing with roofing pitch (see **Figures 24 and 25**). For sloping roofs, place the flashing under the upper and on top of the lower shingles. Nail the flashing to the roof, using roofing nails.
6. Place the spacers and the storm collar over the flashing, and tighten it with the bolt supplied. Finally, seal the joint between the storm collar and the chimney, using silicone caulking.
7. Install the chimney cap. Once the chimney cap is in place, the roof flashing can be washed with a solvent or vinegar and then painted with rust-proof paint.

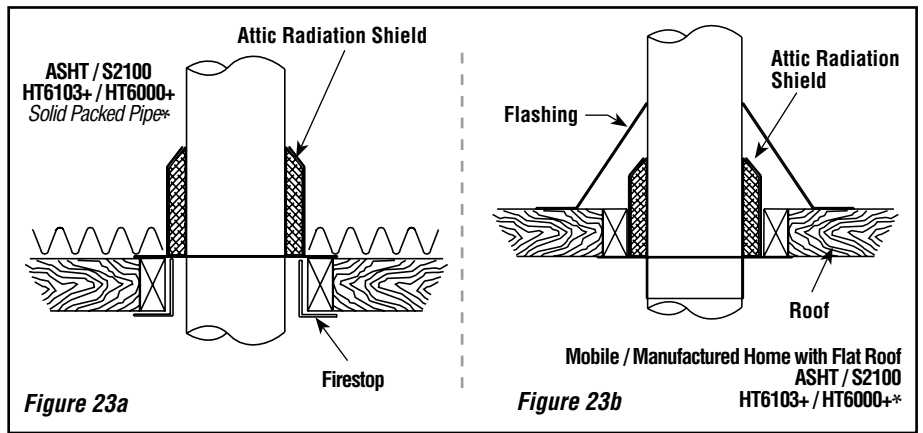


Figure 23a

Figure 23b

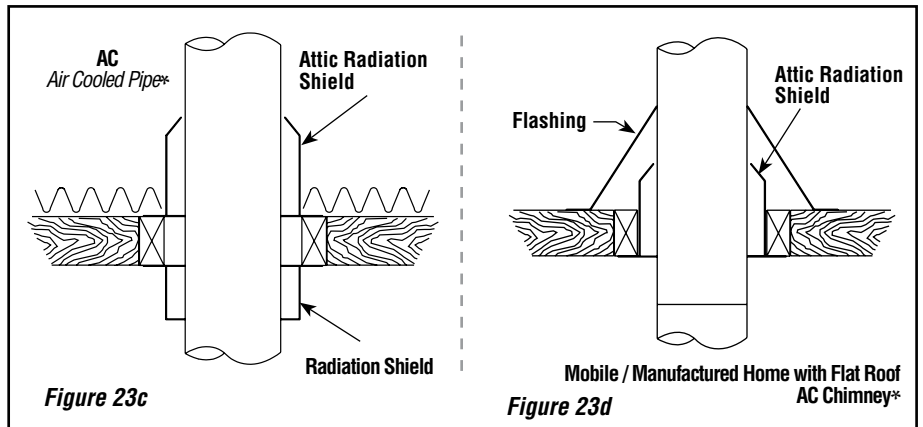


Figure 23c

Figure 23d

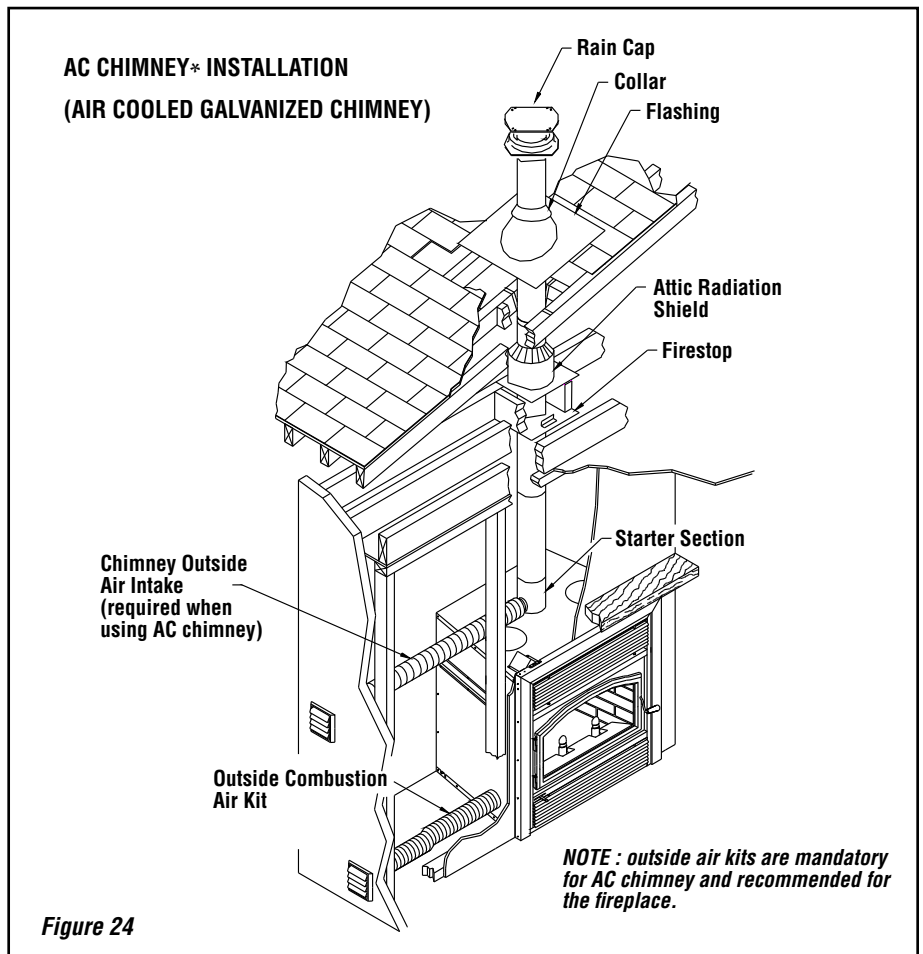


Figure 24

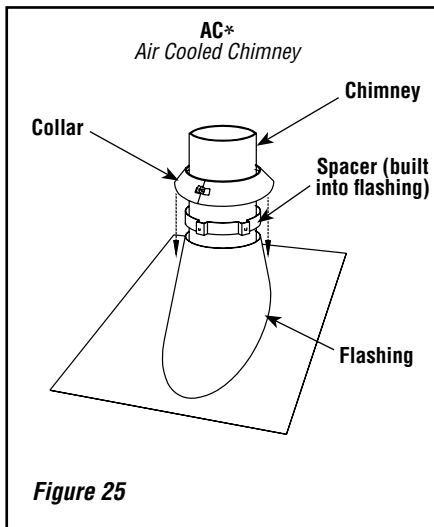


Figure 25

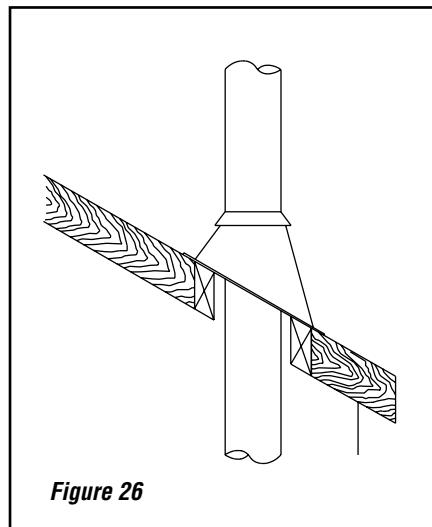


Figure 26

After reaching the location requiring the elbow, proceed as follows:

ASHT / HT6103+ / S2100+ / HT6000+ Chimneys*

1. Install the first elbow; turn it in the required direction. Fasten it to the chimney with the three (3) 1/2" (12 mm) metal screws provided with the elbow.
2. Install the necessary chimney lengths to achieve the required offset. Lock the chimney lengths together: it is recommended to use three (3) 1/2" (12 mm) screws. If the offset length is made of two (2) chimney lengths or more, use an offset or roof support halfway up the offset. If penetrating a wall, install a wall radiation shield (see **Figures 28 and 30**).
3. Use another elbow to turn the chimney vertically. Secure the elbow, using three (3) 1/2" (12 mm) screws (provided with the elbow).
4. Use a plumb-bob to line up the center of the hole. Cut a hole for the chimney in the ceiling/floor. Frame this hole as described previously (refer to section *Chimney Installation Instructions*).
5. From below, install a firestop (See **Figure 23a**).
6. A support (ST* or SO+*) must be used on the first 15' section (5 m).
7. Continue with the regular installation.

| Roof Down Slope Hole Size | | | |
|---------------------------|-------------------|-------------------|------------------|
| SLOPE | ASHT / HT6103+* | S2100+ / HT6000+* | AC* |
| Roof Pitch | 6" | 6" | 6" |
| 0 * | 12-3/8" (314 mm) | 14-1/8" (359 mm) | 15" (380 mm) |
| 2/12 | 12-9/16" (319 mm) | 14-3/8" (365 mm) | 15-3/8" (390 mm) |
| 4/12 | 13" (330 mm) | 14-7/8" (378 mm) | 16-1/8" (410 mm) |
| 6/12 | 13-7/8" (352 mm) | 15-3/4" (400 mm) | 16-7/8" (430 mm) |
| 8/12 | 14-7/8" (378 mm) | 17" (432 mm) | 18-1/4" (465 mm) |
| 10/12 | 16-1/8" (410 mm) | 18-3/8" (467 mm) | 19-5/8" (500 mm) |
| 12/12 | 17-1/2" (445 mm) | 20" (508 mm) | 21-3/8" (545 mm) |

* Cross Slope Hole Size
Put the chimney cap into place.
Wash the roof flashing with a solvent or vinegar, then paint it with rust-proof paint.

Table 3

OFFSET CHIMNEY INSTALLATION

After reaching the location requiring the elbow, proceed as follows. The minimum chimney height when using elbows is:

| Minimum Chimney Height Using Elbows | |
|-------------------------------------|--|
| Fireplace Model | BIS® Ultima-1 |
| Chimney Model* | ASHT / S2100+ / HT6103+ / HT6000+ / AC |
| Vertical installation | 12 feet (3.66 m) |
| Two (2) elbows | 15 feet (4.57 m) |
| Four (4) elbows | 17 feet (5.18 m) |

Table 4

NOTES:


- Must return to vertical before penetrating ceiling or floor.
- A maximum of 2 offsets are allowed.

AC Chimney*

1. Install the first elbow. Turn it in the required direction. To lock it in place, turn 1/8 of a turn. Fasten the straps attached to the elbow to the surrounding frame, using nails or drywall screws (**Figure 28**).
2. Install the necessary chimney lengths to achieve the required offset. Lock the chimney lengths together. If penetrating a wall, use a wall radiation shield.
3. Use another elbow to turn the chimney vertically. Lock it to the chimney. Fasten the straps attached to the elbow to the surrounding framing using nails or drywall screws.
4. Use a plumb-bob to line up the center of the hole. Cut a hole for the chimney in the ceiling. Frame this hole as described previously.
5. From below, install a firestop (see **Figure 23c**).
6. Continue with the regular installation.

NOTE: When using AC chimney, an AC6SB* (H3779*) starter section must be used before installing an elbow. When an offset is needed immediately off the top of the fireplace, an elbow starter section, AC6SB30* (H3780*), is available.

Offset Dimensions

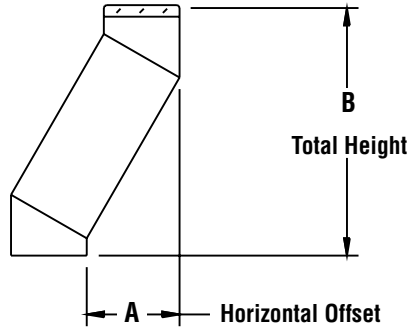

| Chimney 6" * | Elbow | Offset & Height | One Length Between Elbows | | | | | | Two Lengths Between Elbows | | | | | |
|---------------------------------------|-------|-----------------|---------------------------|---------------------|----------------------|---------------------|---------------------|-----------------------|----------------------------|-----------------------|----------------------|----------------------|-----------------------|-----------------------|
| | | | 8" | 12" | 18" | 24" | 36" | 48" | 8" & 48" | 12" & 48" | 18" & 48" | 24" & 48" | 36" & 48" | 48" & 48" |
| Secure Temp ASHT Nova Temp HT6103+ | 15° | A | 3-5/16" (84mm) | 4-5/16" (110mm) | 5-7/8" (149mm) | 7-7/16" (189mm) | 10-1/2" (267mm) | 13-5/8" (346mm) | 15-3/8" (391mm) | 16-7/16" (418mm) | 18" (457mm) | 19-1/2" (495mm) | 22-5/8" (575mm) | 25-3/4" (654mm) |
| | | B | 15-11/16" (398mm) | 19-9/16" (497mm) | 25-3/8" (645mm) | 31-3/16" (792mm) | 42-3/4" (1086mm) | 54-3/8" (1381mm) | 60-15/16" (1548mm) | 64-13/16" (1646mm) | 70-9/16" (1792mm) | 76-3/8" (1940mm) | 87" (2210mm) | 99-9/16" (2529mm) |
| | 30° | A | 7-7/16" (189mm) | 9-7/16" (240mm) | 12-7/16" (316mm) | 15-7/16" (392mm) | 21-7/16" (545mm) | 27-7/16" (697mm) | 30-13/16" (783mm) | 32-13/16" (833mm) | 35-13/16" (910mm) | 38-13/16" (986mm) | 44-13/16" (1138mm) | 50-13/16" (1291mm) |
| | | B | 20" (508mm) | 23-1/2" (597mm) | 28-11/16" (729mm) | 33-7/8" (860mm) | 44-1/4" (1124mm) | 54-11/16" (1389mm) | 60-9/16" (1538mm) | 64" (1627mm) | 69-1/4" (1759mm) | 74-7/16" (1891mm) | 84-13/16" (2154mm) | 95-1/4" (2419mm) |
| | 45° | A | 10-5/16" (262mm) | 13-3/16" (335mm) | 17-3/8" (441mm) | 21-5/8" (549mm) | 30-1/8" (765mm) | 38-5/8" (981mm) | 43-7/16" (113mm) | 46-1/4" (1175mm) | 50-1/2" (1283mm) | 54-3/4" (1391mm) | 63-1/4" (1607mm) | 71-11/16" (1818mm) |
| | | B | 17-13/16" (452mm) | 20-5/8" (524mm) | 24-7/8" (632mm) | 29-1/8" (740mm) | 37-5/8" (956mm) | 46-1/8" (1172mm) | 50-15/16" (1294mm) | 53-3/4" (1365mm) | 58" (1473mm) | 62-1/4" (1581mm) | 70-3/4" (1797mm) | 79-3/16" (2011mm) |

| Chimney 6" * | Elbow | Offset & Height | One Length Between Elbows | | | | | | Two Lengths Between Elbows | | | | | |
|--|-------|-----------------|---------------------------|---------------------|----------------------|---------------------|-----------------------|----------------------|----------------------------|---------------------|----------------------|---------------------|---------------------|-----------------------|
| | | | 8" | 12" | 18" | 24" | 36" | 48" | 8" & 48" | 12" & 48" | 18" & 48" | 24" & 48" | 36" & 48" | 48" & 48" |
| Secure Temp S2100+ Nova Temp HT6000 | 15° | A | 3-5/16" (84mm) | 4-5/16" (110mm) | 5-7/8" (149mm) | 7-7/16" (189mm) | 10-1/2" (267mm) | 13-5/8" (346mm) | 15-1/2" (394mm) | 16-1/2" (419mm) | 18-1/16" (459mm) | 19-5/8" (498mm) | 22-3/4" (578mm) | 25-13/16" (656mm) |
| | | B | 16" (406mm) | 19-7/8" (505mm) | 25-11/16" (652mm) | 31-1/2" (800mm) | 43-1/16" (1094mm) | 54-5/8" (1387mm) | 61-7/16" (1561mm) | 65-1/4" (1657mm) | 71-1/16" (1805mm) | 76-7/8" (1953mm) | 88-1/2" (2248mm) | 100-1/16" (2542mm) |
| | 30° | A | 7-3/8" (187mm) | 9-3/8" (238mm) | 12-3/8" (314mm) | 15-3/8" (391mm) | 21-3/8" (543mm) | 27-3/8" (695mm) | 30-7/8" (784mm) | 32-7/8" (835mm) | 35-7/8" (911mm) | 38-7/8" (987mm) | 44-7/8" (1140mm) | 50-7/8" (1292mm) |
| | | B | 20-11/16" (525mm) | 24-3/16" (614mm) | 29-3/8" (746mm) | 34-9/16" (878mm) | 44-15/16" (1141mm) | 55-5/16" (1405mm) | 61-3/8" (1559mm) | 64-7/8" (1648mm) | 70-1/16" (1780mm) | 75-1/4" (1911mm) | 85-5/8" (2175mm) | 96" (2438mm) |

| Chimney 6" * | Elbow | Offset & Height | One Length Between Elbows | | | | | | Two Lengths Between Elbows | | | | | |
|-----------------|-------|-----------------|---------------------------|-----------------------|---------------------|-----|----------------------|----------------------|----------------------------|----------------------|-----------------------|-----|----------------------|-----------------------|
| | | | --- | 12" | 18" | --- | 36" | 48" | --- | 12" & 48" | 18" & 48" | --- | 36" & 48" | 48" & 48" |
| AC 6" | 15" | A | --- | 4-13/16" (122 mm) | 6-1/8" (156 mm) | --- | 11" (280 mm) | 14-1/8" (359 mm) | --- | 16-7/8" (429 mm) | 18-7/16" (468 mm) | --- | 23" (584 mm) | 26-3/16" (665 mm) |
| | | B | --- | 27-11/16" (703 mm) | 33-1/2" (851 mm) | --- | 50-7/8" (1292 mm) | 62-1/2" (1588 mm) | --- | 72-5/8" (1845 mm) | 78-7/16" (1992 mm) | --- | 95-3/4" (2432 mm) | 107-3/8" (2727 mm) |
| | 30" | A | --- | 9-3/8" (238 mm) | 12-3/8" (314 mm) | --- | 21-3/8" (543) | 27-3/8" (695 mm) | --- | 32-5/8" (829 mm) | 35-5/8" (905 mm) | --- | 44-5/8" (1134 mm) | 50-5/8" (1286 mm) |
| | | B | --- | 25-3/4" (654 mm) | 31" (787 mm) | --- | 46-1/2" (1181 mm) | 57" (1448 mm) | --- | 66" (1676 mm) | 71-1/4" (1810 mm) | --- | 86-7/8" (2207 mm) | 97-1/4" (2740 mm) |

NOTE: With the AC chimney*, a starting length of 6" high must be used on top of the fireplace before installing an elbow.

Figure 27

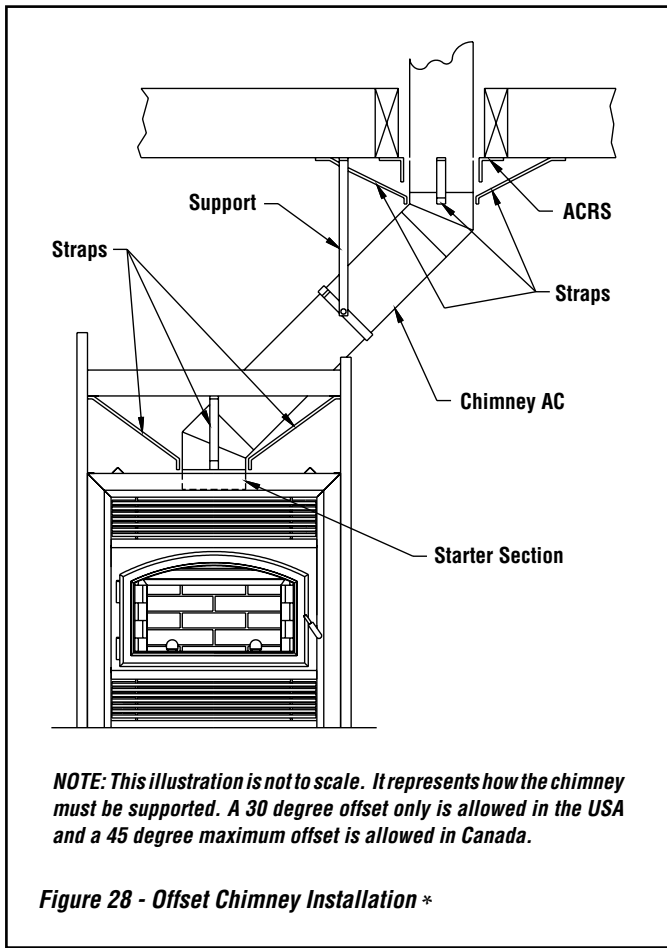


Figure 28 - Offset Chimney Installation *

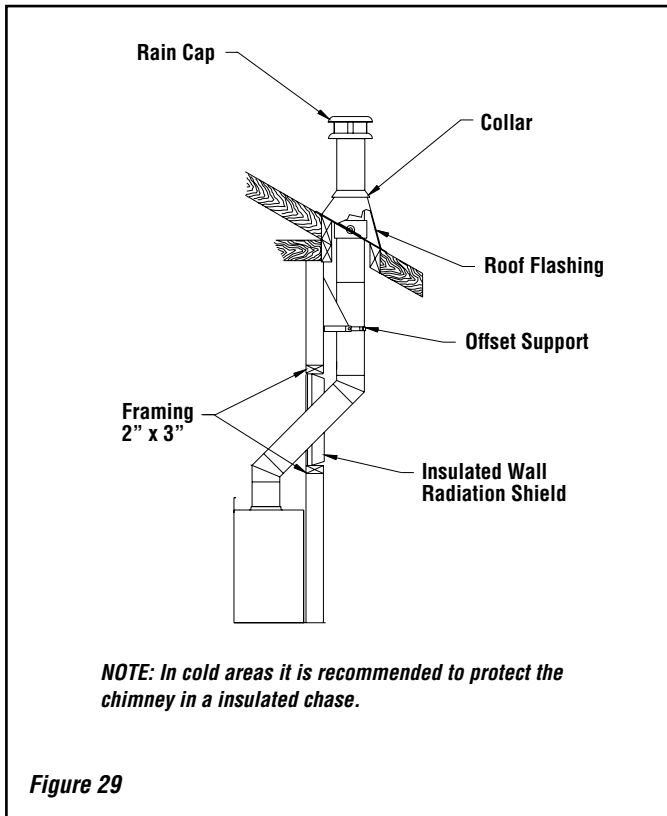


Figure 29

**ANGLED WALL RADIATION SHIELD *
(RSM+ and RSMI30)**

When traversing a combustible wall with the chimney at a 30° or 45° angle, an angled firestop or wall radiation shield must be installed. Only one is required.

NOTE: 45° angle for Canada only (RSMI45*)

In cold climate locations (climates where temperatures will fall below 32° F / 0° C), we recommend that you use the insulated wall radiation shield since it will maintain the home's thermal barrier.

| RSM+ and RSMI30 (RSMI45 - Canada Only) | | |
|---|-------|---------------------------------------|
| Chimney Model * | Angle | Hole Size |
| ASHT / HT6103+ (6" dia). Canada only | 30° | 283 mm x 781 mm (11-1/8" x 30-3/4") |
| | 45° | 283 mm x 518 mm (11-1/8" x 20-3/8") |
| S2100+ / HT6000+ / AC (6" dia). | 30° | 327 mm x 881 mm (12-7/8" x 34-11/16") |
| | 30° | 380 mm x 972 mm (15" x 38-1/4") |

Table 5

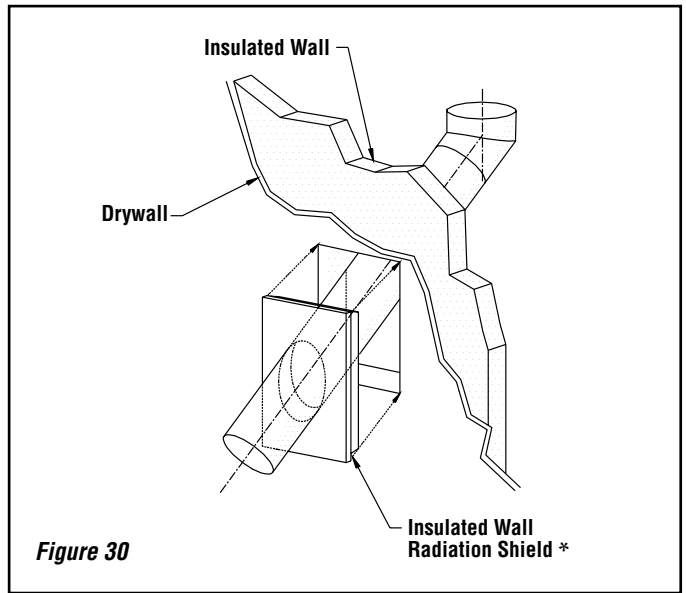


Figure 30

CHIMNEY SUPPORT INSTALLATION

Universal Roof Support*

When installing a support, slightly lift the chimney system so the weight will lie on the support, not on the fireplace to reduce expansion noises. This support has three possible uses:

1. For ASHT / HT6103+ and S2100+ / HT6000+, it must be used on a roof to support the chimney*.
2. It may be used on a floor, ceiling or roof above an offset to support the chimney above the offset.
3. It may be used on a floor, ceiling or roof as a supplementary support.

Table 6 gives maximum height of supported chimney.

NOTE: For the AC chimney*, a support section must be used every 40 feet (12 m) instead of the universal roof support (ST*).

For roof support installation, refer to the instructions provided with the support.

Universal Offset Support*

This support is used to support the chimney above an offset. When the chimney offset is used to traverse a wall this support may be used on the wall to support the chimney. The maximum heights are given in **Table 6**. For offset support installation, refer to the instructions provided with the support.

| CHIMNEY MODEL* | MAXIMUM HEIGHT OF SUPPORTED CHIMNEY | |
|----------------------------|-------------------------------------|-------------------|
| | OFFSET SUPPORT | ROOF SUPPORT |
| ASHT / HT6103+ (6" dia). | 28 feet (8.54 m) | 29 feet (8.84 m) |
| S2100+ / HT6000+ (6" dia). | 18 feet (5.49 m) | 20 feet (6.1 m) |
| AC (6" dia). | 40 feet (12.19 m) | 50 feet (15.20 m) |

Table 6

CHIMNEY CHASE AND MULTIPLE TERMINATIONS

For the purpose of this manual, a chimney chase is considered a part of the chimney system rather than part of a building. The termination must be placed a minimum of 18" (460 mm) above the chase.

For installations where more than one chimney is located in the same chase or within the same area, we suggest that their terminations be separated by at least 16" (410 mm) horizontally, and 18" (460 mm) vertically. This separation is to prevent smoke migrating from one chimney to another (see **Figure 31**).

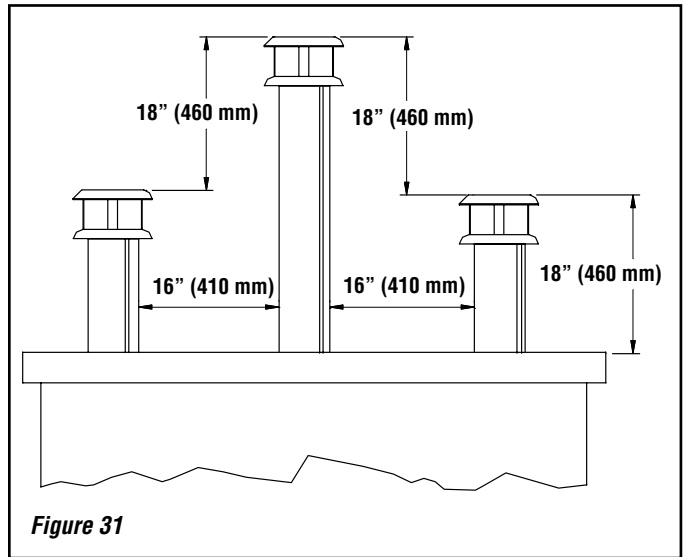


Figure 31

CHIMNEY ADAPTOR* (S2100+ / HT6000+) CANADA ONLY

The fireplace is normally supplied with a chimney adaptor suitable for the ASHT / HT6103+ chimney*. If you want to install a S2100+ / HT6000+ chimney, an adaptor is available (6UCA*) (**Figure 32**). A separate starter section will also be required if AC chimney* is installed.

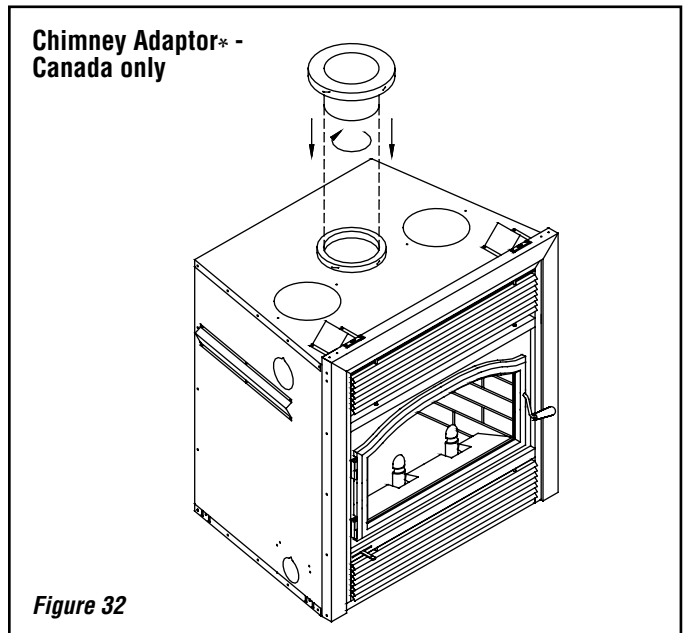


Figure 32

INSTALLATION INSTRUCTIONS FOR MASONRY APPLICATION

WARNING: Before starting the installation, the masonry chimney must be inspected by a qualified chimney sweep.

The following requirements must be respected:

1. The chimney must be absolutely clear of any soot residue or creosote. Check for cracks, loose or missing bricks that could inhibit correct installation of the liner.
2. The clearance to combustibles must be a minimum of 1" between the outside of the masonry and any wood framing or loose insulation.
3. The chimney must be built in accordance with the current building code.
4. No other appliance can be connected to the same chimney.
5. The clearances to combustibles for the BISUMA30* connectors are 2" on the side and bottom and 16" at the top.
6. **The connector parts are not necessary if the connection between the insulated length and the stainless steel liner is done within the masonry chimney.**

Installation:

The chimney must be relined with a stainless steel liner model Tubinox™ or Projet® SS* of the same diameter as the outlet of the fireplace.

For connection at a 30° angle, a special connector (BISUMA30*) must be used to connect the liner to the insulated chimney.

*** IMPORTANT NOTE - The use of a 45° connector (BISUMA*) is approved for use in Canada ONLY. Installations in the USA must use the 30° connector (BISUMA30*).**

Follow these steps:

1. Position the fireplace in its location. Temporarily install the ASHT* elbow on the top of the fireplace and, using a level, mark with an oval the location where the flue liner will enter the masonry chimney.
2. In the middle of the oval, drill a hole in the masonry chimney at 30°.
3. Increase the size of the hole until a 30° Tubinox* liner elbow can be easily slipped through.
4. Slide the liner down from the top of the masonry chimney until you reach the hole level.
5. Slip through the hole a 30° liner elbow and connect it to the liner.
6. Add a small liner section to the liner elbow which will allow the liner to extend at least 12" (measured at the top of the liner) from the masonry chimney.
7. Seal the opening around the liner with high temperature refractory cement.
8. The next steps must be done in the following order:

See typical installation illustrated below.

- A. Select the ASHT* length that will fit between the elbow and the liner so that it will slide at least 2" over the liner section (You may need to cut the liner for a better fit).
- B. Take that section and the BISUMA30* cover and slide it over the liner. Make sure you have enough opening to be able to install the ASHT* elbow without difficulty.
- C. Install the 30° elbow on the fireplace.
- D. Slide the length section back down on the elbow and twist lock the two together.
- E. Pull the cover down over the length and install the insulation pad over the liner; be careful to cover the liner completely.
- F. Slide back the cover over the insulation and fix it in place using the 3 metal screws supplied.

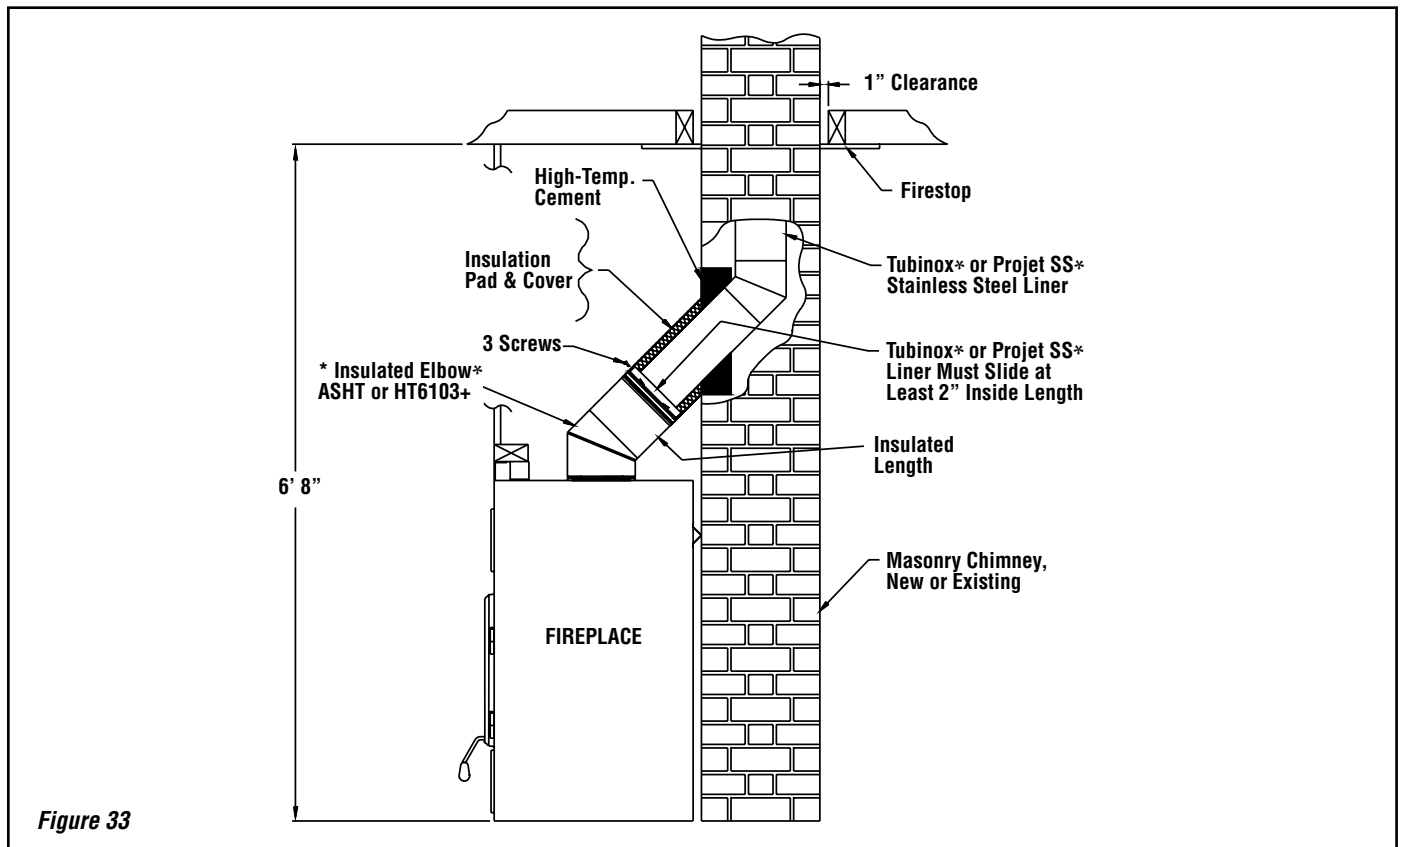


Figure 33

OPTIONAL INSTALLATION ACCESSORIES

| Installation Accessories | |
|---|---------------|
| Description | Cat./Part No. |
| Door Kit (Required - Order Separately) | |
| Victorian Arch Shape Doors, Black | BUVBK |
| Contemporary Arch Shape Door, Black | BUCBK |
| Clean Face Panel Kit | |
| Panel for Clean Face Option (tiling flange) | BUCF |
| Outside Air Kit (Required - Included With Fireplace) | |
| Outside Air Coupler to connect outside air UZI to fireplace, UZIAD | UZIAD |
| Outside Air Ducting - includes 4" insulated flex x 10' long, UZI | UZI |
| Gravity Kit (REQUIRED WITH CLEAN FACE KIT) | |
| Gravity kit: Complete double duct system includes: 2 elbows 90°, 2 telescopic lengths, 2 grill supports and 2 black grills, 2 fireplace adaptors, 7B30ZK-1 | H8947 |
| Gravity Kit Accessories | |
| Elbow 90°, 8" dia., 7B26ZE90 | H8948 |
| Elbow 45°, 8" dia., 7B26ZE45 | H8949 |
| Telescopic length, 8" dia. (15" to 26"), 7B26ZLA | H8950 |
| Adjustable length 8" dia (2" - 5"), 7B26ZL2A | H8951 |
| Length two (2) feet, 8KL2 | H8954 |
| Length one (1) feet, 8KL1 | H8953 |
| Wall radiation shield, 8" I.D., 7B26ZR | H8952 |

| Fireplace Kits | |
|--|---------------|
| Description | Cat./Part No. |
| Blower (heat activated on/off pre-wired), UZY5 | UZY5 |
| Blower motor speed control (wall mount), VRUW | VRUW |
| Rigid firescreen | BUCEBWZN |
| Central Forced Air Kit Accessories ❶ | |
| Central Forced Air Kit, Central forced air kit including: blower (BISZY), flex adaptor (BISAF), 2 clamps, variable speed control (VRUW), thermo-disk (VTU), fan to flexible pipe adapter (BISAVF), back draft damper (BISBD), aluminium tape, BISFWK-1 | BISFWK-1 |
| Flexible pipe 5" I.D. x 15 ft. Long, 5FLEX15 | 5FLEX15 |
| Flexible pipe 5" I.D. x 30 ft. Long, 5FLEX25 | 5FLEX25 |
| Heating and cooling thermostat, 24V, HCTW | HCTW |

❶ **Not tested under EPA certification. If installed, this appliance no longer qualifies for EPA certification.**

REPLACEMENT PARTS LIST

| BIS® Ultima-1 Replacement Parts | |
|--|---------------|
| Description | Cat./Part No. |
| Baffle refractory (2 pieces) | PR-IS02205 |
| Back refractory | PR-SR2203 |
| Right side refractory | PR-SR2204D |
| Left side refractory | PR-SR2204G |
| Bottom refractory | PR-SR2201 |
| Front refractory, right side - ash lip | PR-SR2202D |
| Front refractory, left side - ash lip | PR-SR2202G |
| Door handle | PR-SR1787 |
| Ceramic glass panel Contemporary | PR-SR2222 |
| Ceramic glass panel Victorian | PR-SR2230 |
| Secondary air tube | PR-SR2271 |
| Cast-iron log supports (2) | PR-SR2245 |
| Touch-up paint, aerosol, black metallic SBMB6309 | H8159 |
| Louvers, upper and lower (1) | PR-SR2218-1 |
| Snap disc, blower | VTU |
| Bracket, secondary air tube | PR-SR2214 |
| Hinge assembly, fireplace and door | PR-SR2395UL |
| Door handle rod and mechanism | PR-SR2118 |
| Door handle and brass cap | PR-SR2325 |
| Door handle brass cap | POIGNE002 |
| Gasket, door, 73" (5/8" dia.) | PR-SR1823G |
| Gasket, glass, 69" (5/16" dia.) | PR-SR1685D |
| Blower 250 CFM for central forced air kit, BISZY | BISZY |
| Blower variable speed control with decorative wall plate for (BISZY), VRUW | VRUW |
| Thermo-disk, on/off blower control (for BISZY), VTU | VTU |
| Blower to flexible pipe adaptor, BISAVF | BISAVF |
| Backdraft damper, BISBD | BISBD |
| Fireplace to Flex adaptor and 2 clamps, BISAF | BISAF |

Contact an IHP dealer to obtain any of these parts. Never use substitute materials not approved by IHP. Use of non-approved parts can result in poor performance and safety hazards.

SPECIFICATIONS

| Cat. No. | Model |
|-------------|--------------|
| BISULTIMA-1 | BIS Ultima-1 |

| Product Reference Information | |
|---------------------------------------|-------------------------|
| Weight | 385 lbs |
| Height | 36" |
| Width | 36" |
| Depth | 24-1/2" |
| Firebox W x H x D - measured in front | 22" x 11-3/4" x 12" |
| Chimney weight ASHT (6" dia) | 6.25 lb per linear foot |
| Chimney weight AC (6" dia) | 3.25 lb per linear foot |
| Chimney weight S2100+ (6" dia.) | 10.8 lb per linear foot |

CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

Side wall: 17" (324 mm) measured from the fireplace side.

Ceiling: 6' 8" (2,032 mm) measured from the base of the fireplace.

Fireplace enclosure:

Bottom: 0"

Side: 0" to spacer

Back: 0" to spacer

Top: Do not fill the space above the fireplace with any material (Except the wood framing. See **Page 10, Figure 9**).

Chimney: 2" (50 mm)

Mantel: 45" (1143 mm) measured from the base of the fireplace.

SECURITY CHIMNEYS™ - PARTS AND COMPONENTS LISTS

The components listed below must be ordered from Security Chimneys International™. Contact your Security Chimneys Distributor or Dealer for ordering information.

Security Chimneys International Limited 450-973-9999
 2125 Monterey, Laval, Quebec 1-800-361-4909 (USA)
 Canada, H7L 3T6 1-800-667-3387 (Canada)
 www.securitychimneys.com

| Secure Temp® ASHT 1" High Temp. Insulated Stainless Steel Chimney 6" I.D and 8" O.D., Double-Wall Stainl. Steel, Listed to CAN/UCL-S604 and UL-103HT | |
|---|---------------|
| Description | Part/Cat. No. |
| Lengths and Misc. Chimney Components | |
| 8" length, 6" Dia., 6L8 | 6L8 |
| 12" length, 6" Dia., 6L12 | 6L12 |
| 18" length, 6" Dia., 6L18 | 6L18 |
| 24" length, 6" Dia., 6L24 | 6L24 |
| 36" length, 6" Dia., 6L36 | 6L36 |
| 48" length, 6" Dia., 6L48 | 6L48 |
| Adjustable Length 12", 6" Dia., 6LA | 6LA |
| 15° elbow, 6" Dia., 6E15 | 6E15 |
| 30° elbow, 6" Dia., 6E30 | 6E30 |
| Rain Termination Cap, 6" Dia., 6CC | 6CC |
| Spark Arrester Screen (universal spark arrester band), PE | PE |
| Wall Band, BM | BM |
| Supports | |
| Offset Support, SO | SO |
| Roof Support, ST | ST |
| Roof Brace, BS2 | BS2 |
| Firestops | |
| Firestop, 6BF | 6BF |
| Radiation Shield, 6RS | 6RS |
| Insulated Attic Radiation Shield, 6RSA | 6RSA2 |
| Insulated Wall Radiation Shield, 6RSM | 6RSM |
| Insulated Wall Radiation Shield, 30°, 6RSMI30 | 6RSMI30 |
| Uninsulated Wall Radiation Shield, 30°, 6RSM30 | 6RSM30 |
| Attic Radiation Shield | H0487 |
| Roof Flashings | |
| Flat Roof Flashing, 6FR | 6FR |
| 1/12 - 7/12 (5° - 30°), 6FAR | 6FAR |
| 8/12 - 12/12 (30° - 45°), 6FBR | 6FBR |
| Storm Collar, 6FC | 6FC |

Fireplace Model BIS® Ultima-1 - Approved Venting Components manufactured by Security Chimneys International™ only.

- **6" diameter chimney** - AC (air cooled), Secure Temp® ASHT (or Nova Temp® HT6103+) and Secure Temp S2100+ (or Nova Temp HT6000+).
- **6" diameter chimney for relining masonry chimneys** - Tubinox™ chimney (or Projet® SS), 6" diameter with adaptor for installation in a masonry chimney.

NOTES:

- ① Nova Temp HT6000+ is equivalent to Secure Temp S2100+
- ② Nova Temp HT6103+ is equivalent to Secure Temp ASHT
- ③ This appliance is equipped with the ASHT Chimney Adaptor. When other chimney is used, a chimney adaptor for that chimney will be required.
- ④ Chimney Adaptor (S2100+ / HT6000+) for CANADA ONLY - If you want to install a S2100+ / HT6000+ chimney, an adaptor is available (6UCA).
- ⑤ AC Chimney is NOT recommended at elevations above 4,000 feet or in cold climates (climates where temperatures will fall below 32° F / 0° C). When using AC chimney, an AC6SB (H3779) starter section must be used before installing an elbow. When an offset is needed immediately off the top of the fireplace, an elbow starter section, AC6SB30 (H3780), is available.

SECURITY CHIMNEYS™ - PARTS AND COMPONENTS LISTS

The components listed below must be ordered from Security Chimneys International™. Contact your Security Chimneys Distributor or Dealer for ordering information.

Security Chimneys International Limited 450-973-9999
 2125 Monterey, Laval, Quebec 1-800-361-4909 (USA)
 Canada, H7L 3T6 1-800-667-3387 (Canada)
 www.securitychimneys.com

| (AC) Air-Cooled Chimney System* | |
|---|---------------|
| 6" I.D. and 11" O.D. Air Cooled, Stainl. Steel inner and zinc coated steel exterior | |
| AC Starter Adaptors One of the following adaptors is required if installing an AC chimney system | |
| <i>* AC Chimney is NOT recommended at elevations above 4,000 feet or in cold climates (climates where temperatures will fall below 32° F / 0° C).</i> | |
| Description | Cat./Part No. |
| Starter Section (adaptor), 6", AC, AC6SB | H3779 |
| Starter 30° Elbow, 6" AC, AC6SB30 | H3780 |
| The following outside air kit is required if installing an AC chimney system | |
| Chimney Outside Air Kit (flex, insulation, outside register and coupling), ACZI | H1967 |
| Lengths and Misc. Chimney Components | |
| 12" Length, 6" Dia. x 12" Long, AC6L12 | H0472 |
| 18" Length, 6" Dia. x 12" Long, AC6L18 | H0473 |
| 36" Length, 6" Dia. x 36" Long, AC6L36 | H0474 |
| 48" Length, 6" Dia. x 48" Long, AC6L48 | H0475 |
| 15° Elbow, 6" Dia., AC6E15 | H0476 |
| 30° Elbow, 6" Dia., AC6E30 | H0477 |
| Rain Termination Cap, 6" Dia., AC6CPR | H0478 |
| Spark Arrester Screen (universal spark arrester band), PE | PE |
| Wall Band, XBM | XBM |
| Supports | |
| Offset Support, SO | SO |
| Support Section, AC6SL | H0481 |
| Roof Support, ST | ST |
| Roof Brace, BS2 | BS2 |
| Roof Flashings | |
| Flat Roof Flashing, ACF | H0494 |
| 1/12 - 7/12 (5° - 30°), AC Adj. Roof Flashing, FA | H0495 |
| 8/12 - 12/12 (30° - 45°), AC Adj. Roof Flashing, FB | H0496 |
| Storm collar, ACFC | H0500 |
| Misc. | |
| Telescopic attic radiation shield, ACRST | H0498 |
| Firestop, ACBF | H0485 |
| Radiation Shield, ACRS | H0486 |
| Attic Radiation Shield, ACRSA | H0487 |
| Insulated Wall Radiation Shield, 30°, ACRSMI30 | H0489 |

| Tubinox™ LL Chimney Lining System | |
|---|---------------|
| Rigid Stainless Steel Liner For Relining A Masonry Chimney, 6" Diameter <i>Listed to ULC-S635M, UL-1777 and ULC-S640M at 2100° F</i> | |
| Description | Cat./Part No. |
| 6" Length, 6" Dia., 6LL6 | 6LL6 |
| 12" Length, 6" Dia., 6LL12 | 6LL12 |
| 24" Length, 6" Dia., 6LL24 | 6LL24 |
| 36" Length, 6" Dia., 6LL36 | 6LL36 |
| 48" Length, 6" Dia., 6LL48 | 6LL48 |
| Adjustable Length (7" to 11"), 6" Dia., 6L7A | 6L7A |
| Split Base Tee, 6" Dia., 6LT | 6LT |
| Tee Cap, 6" Dia., 6TCS | 6TCS |
| Twist Lock Tee Cap, 6" Dia., 6LTC | 6LTC |
| Elbow 30°, 6" Dia., 6LE30 | 6LE30 |
| Elbow 45°, 6" Dia., 6LE45 | 6LE45 |
| Elbow 90°, 6" Dia., 6LE90 | 6LE90 |
| Rain Termination Cap (regular), 6" Dia., 6LCS | 6LCS |
| Rain Termination Cap (deluxe), 6" Dia., 6LCC | 6LCC |
| Spark Arrester Screen (universal spark arrester band), PE | PE |
| Supports | |
| Top Support, 6LST | 6LST |
| Support Assembly, 6LSA | 6LSA |
| Interior Support, 6LSB | 6LSB |
| Adaptor Flexible Pipe (male), 6LAAM | 6LAAM |
| Adaptor Flexible Pipe (female), 6LAAF | 6LAAF |
| Stainless Steel Flex - five (5) feet Long, 6LLFLEX | 6LLFLEX |
| Adjustable Insulated Wall Radiation Shield 6" - 12", 6LRSMI | 6LRSMI |
| Adaptors to Masonry Chimney | |
| Masonry Chimney Adaptor, 45°, BISUMA (for use with Tubinox liner) CANADA ONLY | BISUMA |
| Masonry Chimney Adaptor, 30°, BISUMA30 (for use with Tubinox liner) | BISUMA30 |

| Gravity Kit Accessories | |
|--|----------|
| Elbow 90°, 8" dia., 7B26ZE90 | 7B26ZE90 |
| Elbow 45°, 8" dia., 7B26ZE45 | 7B26ZE45 |
| Telescopic length, 8" dia. (15" to 26"), 7B26ZLA | 7B26ZLA |
| Adjustable length 8" dia (2" - 5"), 7B26ZL2A | 7B26ZL2A |
| Wall radiation shield, 8" I.D., 7B26ZR | 7B26ZR |
| Black grill with support, 7B30ZO | 7B30ZO |
| Brass grill (for 7B30ZK), 7B30ZGB | 7B30ZGB |
| Length one (1) feet, 8KL1 | 8KL1 |
| Length two (2) feet, 8KL2 | 8KL2 |
| Length three (3) feet, 8KL3 | 8KL3 |
| Length four (4) feet, 8KL4 | 8KL4 |
| Length five (5) feet, 8KL5 | 8KL5 |

WARRANTY

Your fireplace is covered by a limited warranty. Please read the warranty to be familiar with its coverage.

Retain this manual. File it with your other documents for future reference.

PRODUCT REFERENCE INFORMATION

We recommend that you record the following important information about your fireplace. Please contact your IHP dealer for any questions or concerns. For the number of your nearest IHP dealer, please call 1-800-655-2008.

REPLACEMENT PARTS

See **Page 23** for a complete replacement parts list. Use only parts supplied from the manufacturer.

Normally, all parts should be ordered through your IHP distributor or dealer. Parts will be shipped at prevailing prices at time of order.

When ordering repair parts, always give the following information:

1. The model number of the appliance.
2. The serial number of the appliance.
3. The part number.
4. The description of the part.
5. The quantity required.
6. The installation date of the appliance.

If you encounter any problems or have any questions concerning the installation or application of this system, please contact your dealer.

IHP

1508 Elm Hill Pike, Suite 108

Nashville, TN 37210

Visit us at www.LennoxHearthProducts.com

Your Fireplace's Model Number _____
Your Fireplace's Serial Number _____
The Date On Which Your Fireplace Was Installed _____
Your Dealer's Name _____
Your Dealer's Phone Number _____



We recommend that our woodburning hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Woodburning Specialists or who are certified in Canada by Wood Energy Technical Training (WETT).



IHP reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products. Consult your local distributor for fireplace code information.

