VFC24(L/C)(V/I) Symphony Vent Free Fireplace System

MONESSEN

LOVE AT FIRST LIGHT

VFC24L with Cinnamon brick liner and decorative face

VFC24C with Black Magic liner and Diamond and Onyx fireglass

ACTUAL DIMENSIONS

Actual size: 24⅝"W x 26½"H x 14½"D x 19"RW
(625 mm x 673 mm x 368 mm x 482 mm)
Viewing area: 22⅝"W x 16¼"H
(575 mm x 413 mm)
Framing Dimensions: 25⅛"W x 26¾"H x 13⅜"D
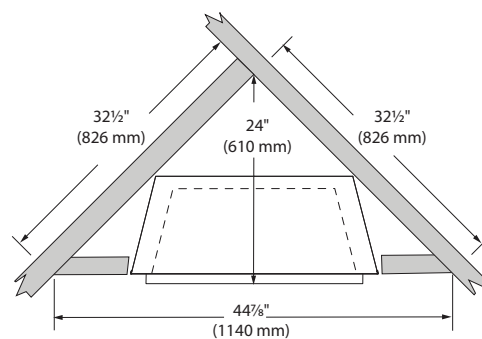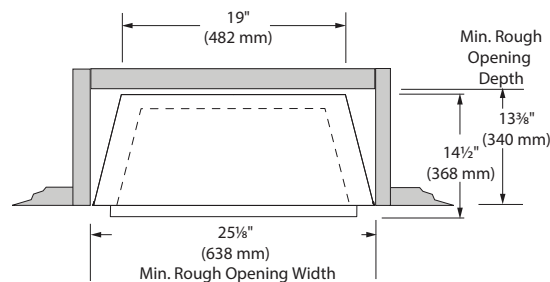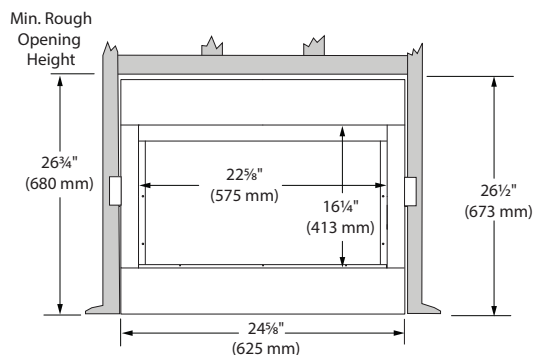(638 mm x 673 mm x 340 mm)

STANDARD FEATURES

- Ventless design
- Available with exclusive five piece log set and Natural Blaze burner, or with fireglass kit and a contemporary burner
- Zero clearance
- Mesh screen front
- Easy access control panel
- Millivolt or Ecologic® IPI control

FIELD INSTALLED ACCESSORIES

- Variety of fireglass media options (contemporary only)
- Cinnamon firebrick, Colonial Red Firebrick, Black Magic or Black porcelain panels
- Decorative or Transitional face, Black
- Remote Controls — RCB, RCMT, TSMT, RCST, TSST
- Variable thermostat controlled blower, 160 cfm or 135 cfm

TECHNICAL INFORMATION

- BTU/HR Input: 22,000 Max. / 16,000 Min. (NG)
  22,000 Max. / 20,000 Min. (LP)
- Ignition System: Millivolt or IPI Control
- Thermal Efficiency: Up to 99.9%
- Clearances - to Combustibles: 0" on all sides
  firebox opening to combustible side wall: 9" minimum
  firebox opening to ceiling: 42" minumum
  Mantel clearance: 10" minimum
- Gas Line: 18" Flex line w/shut off 1/2" FPT
- CSA Design Certified

EcoLogic 2.0

Min. Rough Opening Height

26¾" (680 mm)

22⅝" (575 mm)

16¼" (413 mm)

26½" (673 mm)

24⅝" (625 mm)

19" (482 mm)

Min. Rough Opening Depth

13⅜" (340 mm)

14½" (368 mm)

25⅛" (638 mm)
Min. Rough Opening Width

32½" (826 mm)

24" (610 mm)

32½" (826 mm)

44⅞" (1140 mm)

NFI ADVOCATE — HPBA Hearth, Patio & Barbecue Association — CERTIFIED® — DESIGN CERTIFIED — AHRI MEMBER — Sensible Green Heat Vent-Free Gas Products

149 Cleveland Drive, Paris, Kentucky 40361
www.monessenhearth.com